


75022 V (0.6L/3.7) FLEXIBLE PVC

VIDEO – COAXIAL CABLE

Series RG 59 - 75 OHMS

Cables for indoor installation; e.g. for networking video surveillance systems!

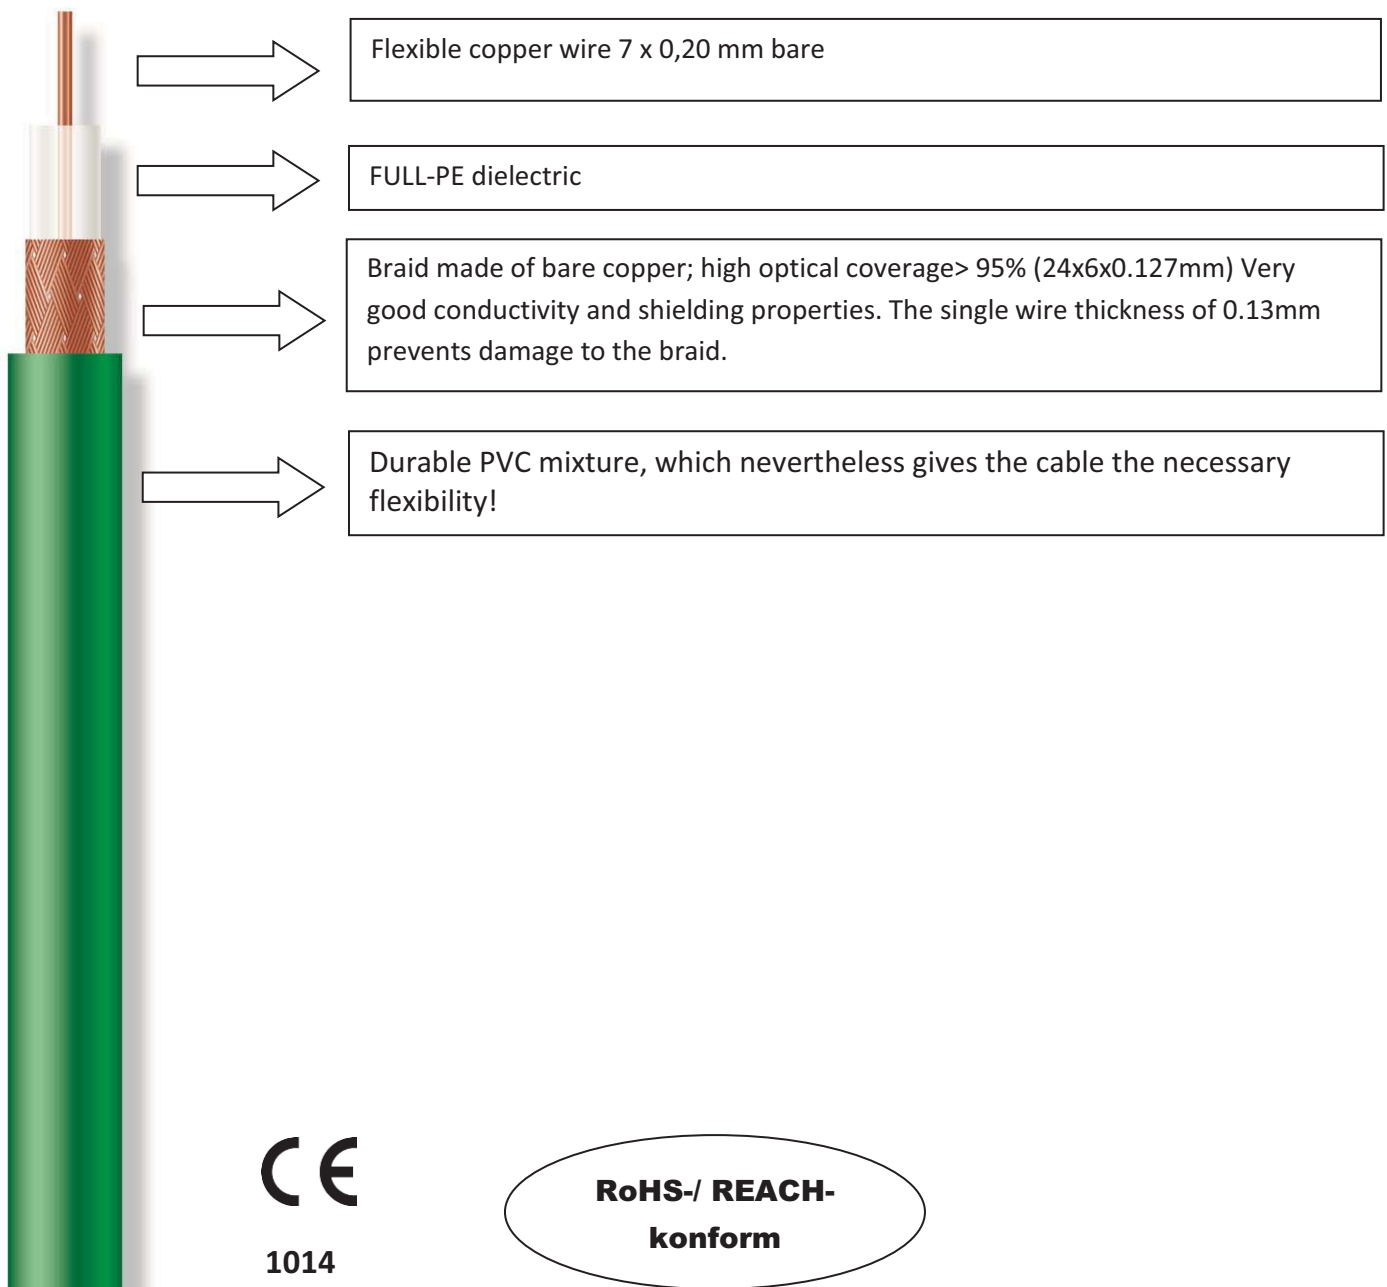

75022 V (0.6L/3.7) FLEXIBLE PVC

VIDEO –COAXIAL CABLE

Series RG 59 - 75 OHMS

DATA SHEET

Construction:	
Inner Conductor	0,6 mm flexible 7 x 0,20 mm copper bare
Insulation	3,7 mm PE massive +/- 0,1
Outer Conductor	
a)	Copper braid bare (24x6x0,127 mm) >95%
b)	
c)	
d)	
Jacket	6,1 mm PVC +/- 0,2 black or green
Electrical properties:	
Characteristic impedance	75 Ohms +/- 3
Capacity (pF/m)	67
Velocity of propagation (v/c)	0,66
Attenuation by 20°C (dB 100m)	
	1 MHz - 1,2 5 MHz - 2,8 10 MHz - 4,1
Screening efficiency (dB)	75 dB
DC resistance (Ohms/km)	Innenleiter: 82 Aussenleiter: 13
Mechanical properties:	
Minimum bending radius	30 mm
Weight kg/km	+/- 52,2
Copper No. kg/km	+/- 24
Fire protection class:	Eca according BPV/CPR EN50575:2014
Temperatue range C°	- 20,0 bis + 70 C°
Suitable F-Compression connectors	
Cablecon	F-59 CX3 3.9, High End 3.9, BNC CX3 3.9