


BOSCH

Invented for life

LBC 2900/xx Unidirectional Handheld Microphones



- Unidirectional dynamic microphone
- Handheld or stand-mounted use with clip (supplied)
- Rugged construction
- Modern non-reflective dark grey finish

With this unidirectional microphone, Bosch provides impressive audio performance at an economical price. The LBC 2900/xx is based on a dynamic transducer element that is designed for high speech intelligibility. Its rugged enclosure is both stylish and easy to use in a wide range of public and sound reinforcement applications.

Functions


The LBC 2900/xx is a unidirectional microphone intended for either handheld or stand-mounted use. It has excellent cardioid directivity, which reduces acoustic feedback. The built-in on/off switch on the microphone body and the 3-pin lockable XLR connector at the base ensure that the microphone is easy to install and securely connected. Its modern design gives shielding against bursts (pops).

The LBC 2900/xx is ideal for use with Bosch mixing amplifiers, which are fitted with jack or XLR connectors for the input channels. Together, they provide affordable yet highly versatile public address solutions for shops, restaurants, leisure centers and other smaller applications.


Certifications and Approvals

Region	Certification	
Europe	CE	Declaration of Conformity


Installation/Configuration Notes

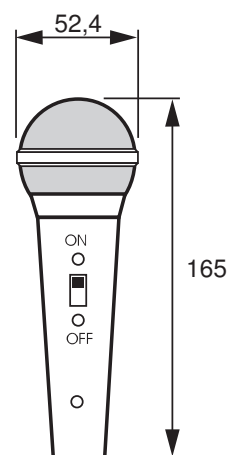


Dimensions in mm

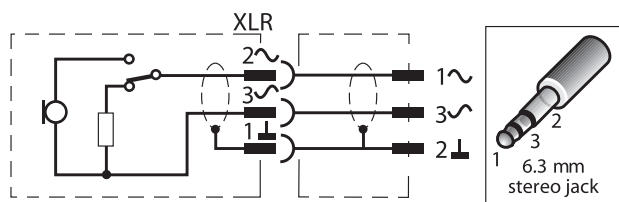

Circuit diagram

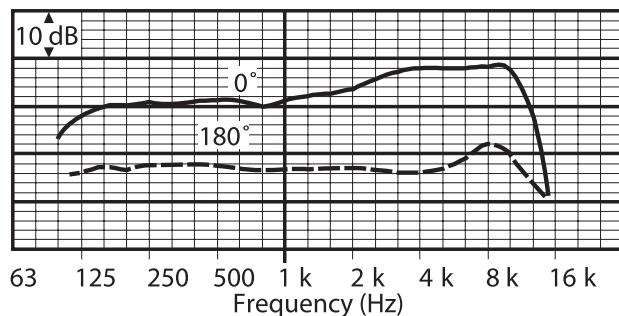

Frequency response

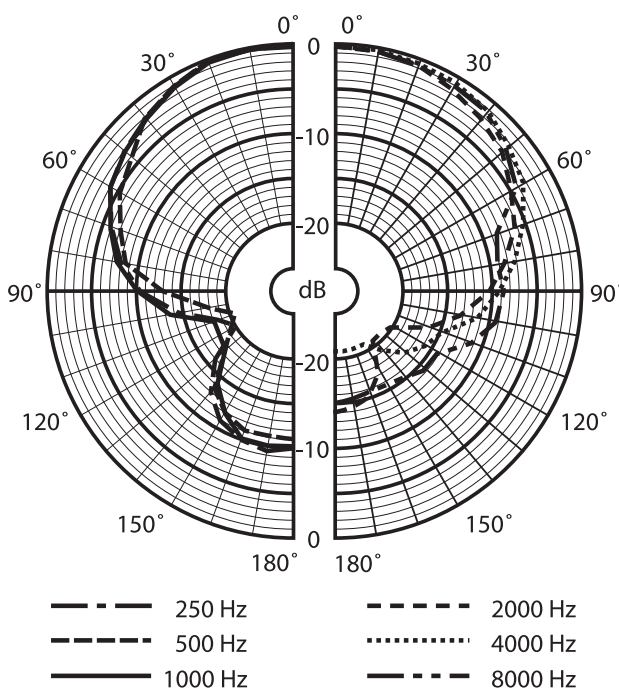

Polar diagram

Parts Included

Quantity Component

- 1 LBC 2900/15 with 7 m (23 ft) shielded black cable terminated with a 6.3 mm (1/4") stereo jack plug
or
LBC 2900/20 with a 7 m (23 ft) shielded black cable terminated with an XLR male plug
- 1 Stand bracket with push-on clip for use with microphone stand, and screw-thread adapter for 3/8", 1/2", or 5/8" Whitworth-threaded stand

Technical Specifications

Electrical*

Type	Handheld
Polar pattern	Unidirectional
Frequency range	80 Hz to 12 kHz
Sensitivity	1.7 mV/Pa \pm 3 dB
Rated output impedance	600 ohm

* Technical performance data acc. to IEC 60268-4

Mechanical

Dimensions (D x L)	52.4 x 165 mm (2.06 x 6.49 in)
Weight	270 g (9.5 oz)
Color	Dark gray
Switch	On/off slide
Cable length	7 m (23 ft)
Connector (/15)	6.3 mm (1/4") stereo jack
Connector (/20)	3-pin XLR

Environmental

Operating temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

Ordering Information

LBC 2900/15 Unidirectional Handheld Microphone **LBC2900/15**

with 7 m (23 ft) cable XLR female / 6.3 mm (1/4") stereo Jack plug connection cable

LBC 2900/20 Unidirectional Handheld Microphone **LBC2900/20**

with 7 m (23 ft) cable XLR male/ female connection cable

Accessories

LBC 1215/01 Microphone Clamp **LBC1215/01**

spring-loaded microphone holder, friction angular adjustment

LBC 1221/01 Floor Stand **LBC1221/01**

Three folding legs, adjustable length with twist clamp.

LBC 1227/01 Table Stand **LBC1227/01**

with 3/8" Whitworth stud; 130 mm (5.12 in) diameter

LBC 1226/01 Adjustable Boom **LBC1226/01**

maximum reach of 670 mm (2.12 ft); length 840 mm (2.76 ft)

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific: Robert Bosch (SEA) Pte Ltd, Security Systems 11 Bishan Street 21 Singapore 573943 Phone: +65 6258 5511 Fax: +65 6571 2698 apr.securitysystems@bosch.com www.boschsecurity.com	Represented by
---	-----------------------