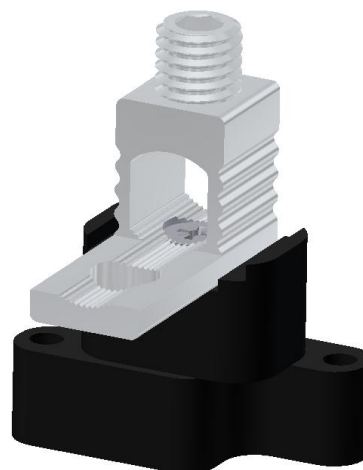


Product data


Product code	VC04-0007	STK-code	5202431	EAN-code	6410052024314
Product name	Insulated Universal connector 1xAl/Cu 1,5-50mm ²				
Wires	1xAl/Cu 1,5-50mm ²				

Technical data

Nominal current	Cu	160	A
	Al	145	A
Nominal voltage		690	V
Max. Current (US)	Cu	-	A
	Al	-	A
Max. Voltage (US)		-	V
Number of pole		1	pcs
Max. Cross section		50	mm ²
Tightening torque	1,5-2,5 mm ²	1,5	Nm
	4-10 mm ²	5	Nm
	16-50 mm ²	12	Nm
	-	-	Nm
Max. Operating temperature		80	°C
Weight		20	g
IP-protection		-	
Standards	EN 61238-1:2003		
Color/ Material	Tin plated aluminium/ Black PA66		
Mounting/ Connection	Screw M4		


Description

OTE-connectors are designed to be used connecting aluminium and copper conductors to equipment.

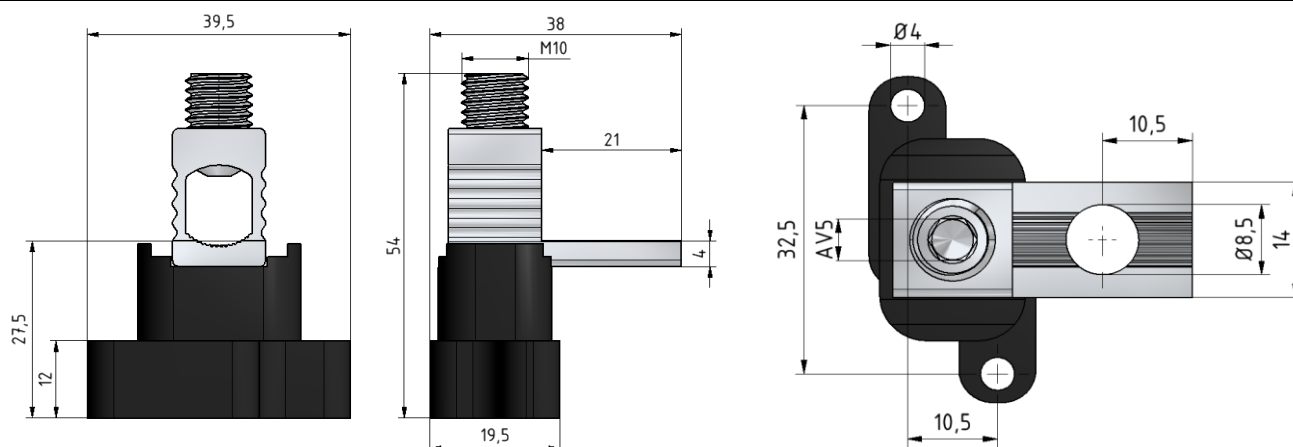Drawing

Package

Package	Box	pcs/ package	30	Weight [Kg]	0,64
Length [mm]	210	Width [mm]	155	Height [mm]	105