

BD2-AK3X/GSTZ00 TAP-OFF UNIT 125A / 1X 3POLE FU SE SWITCH DISC.

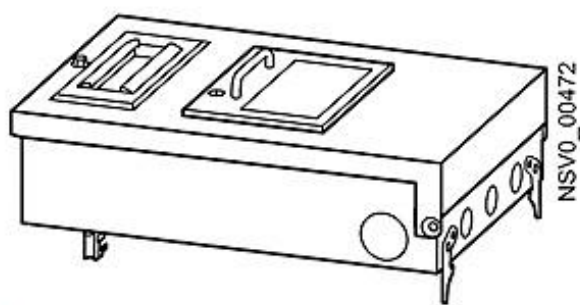


Figure similar

Model	
Product designation	tap-off unit for BD2 busbar trunking system
Protection class	
Protection class IP	IP54
Main circuit	
Operating frequency / rated value	
• minimum	50 Hz
• maximum	60 Hz
Operating voltage / at AC	
• at 50 Hz / rated value / maximum	690 V
• at 60 Hz / rated value / maximum	690 V
Operating current	
• for circuit 1 / at AC / at 50 Hz / rated value / maximum	125 A
• for circuit 1 / at AC / at 60 Hz / rated value / maximum	125 A

Connections

Connectable conductor cross-section / in the outgoing unit

- minimum
- maximum

10 mm²

70 mm²

Tap-off points

Outgoing unit version

cable entry

Design of short-circuit and overloading protection / in the outgoing unit

3-pole NH00 125 A fuse switch-disconnector

Size of the outgoing feeder

3

Number of poles / of the outgoing feeder

5

Mechanical Design

Height

215 mm

Width

205 mm

Length

440 mm

Product component / Locking mechanism

Yes

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:203163>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:203163>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:203163

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>