




BESKRIVELSE

52CES

Kuglehane med fuldt gennemløb 3/4",
muffe/muffe.
Med sensortilslutning for varmemåler, M10x1
Rødt T-greb

EN 13828

DIMENSIONER

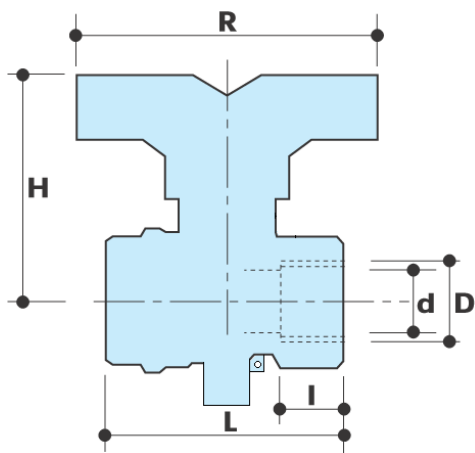

D	1/2"	3/4"
d	15	20
H	46	55.5
I	12	13
L	47,4	58
R	58	65
Acc.	1	2
g	180	280

Alle gevind er i overensstemmelse med
EN 10226-1.

Temperatursensor M10x1

MATERIALER




Ventil	CuZn40Pb2 Cw617N (DIN 50930 del.6)
Kugle	CuZn40Pb2 Cw617N (DIN 50930 del.6) Diamantslabet og hårdforkromet
Spindle	CuZn39Pb3 Cw614N (DIN 50930 del.6)
Pakdåse	CuZn39Pb3 Cw614N (DIN 50930 del.6) Justerbar.
Pakninger	PTFE
O-ringe	2 x Viton® PTFE seal.
Greb	Aluminium

GREBSVARIANTER


52CES Rødt T-greb

TRYKTABSDIAGRAM

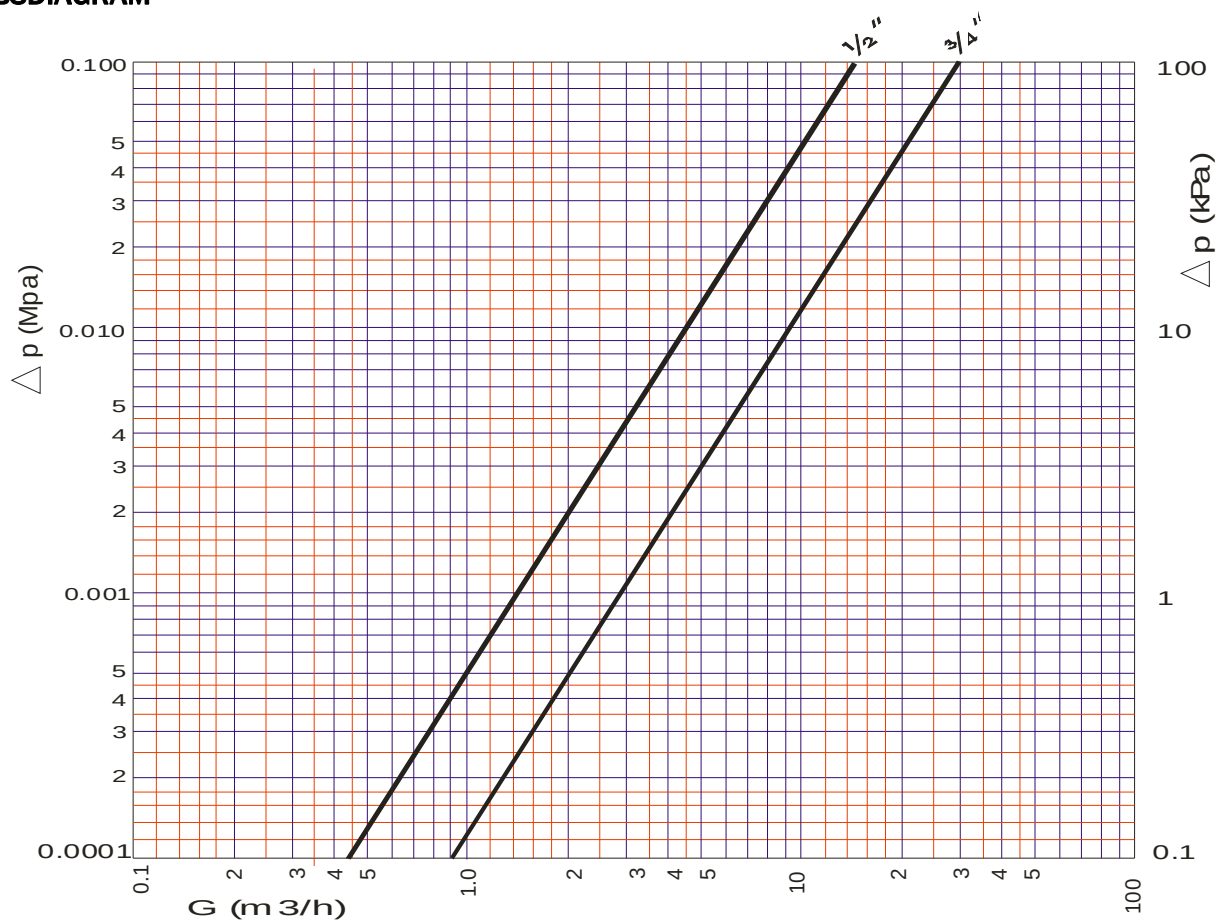

Dim.	1/2"	3/4"
KV	14,5	30

TEMPERATUR / TRYKDIAGRAM

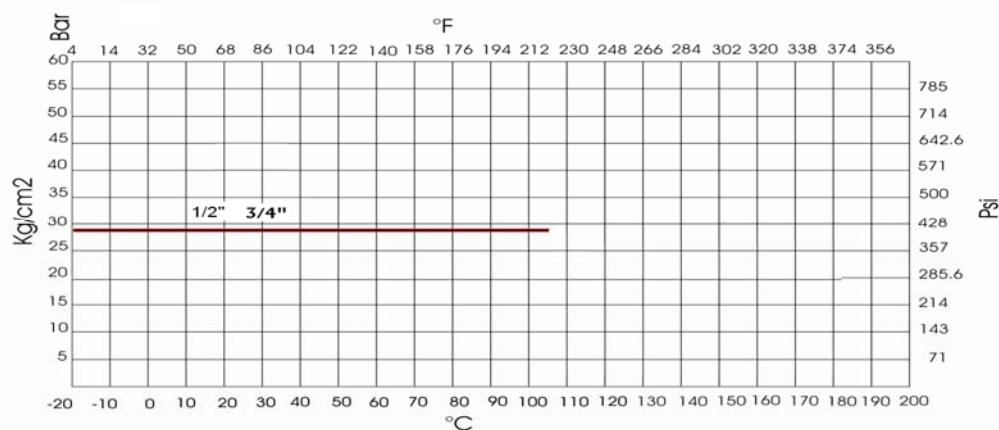

ANBEFALET DRIFTSTEMPERATUR/ MAKSIMALTRYK

28 bar - $100^{\circ}C$ - non shock*

GODKENDELSE



* ventil specifikationer uden temperatursensor.