


Product data						
Product code	VC01-0029		STK-code	1914198	EAN-code	6410019141986
Product name	OL 25-95 T					
Wires	1xAl/Cu 25-95 r	nm²				
Technical data						
Nominal current	Cu	320	A			
	Al	320	A			
Nominal voltage		-	V			
Max. Current (US)	Cu	-	Α			
	Al	-	Α			
Max. Voltage (US)		-	V			
Number of pole		1		4		
Max. Cross section		95	mm²			
Tightening torque	25-95	20	Nm			
					1//	
Max. Operating temperature 80		°C				
Weight 69		69	g			CCV
IP-protection		-				RoHS
Standards		-				
Color/ Material Stainless stee		eel/ Tin plated coppe	r			
Mounting/ Connection Screw M8		Screw M8				

OL-connectors are designed to be used connecting aluminium and cobber conductors. Frames are made of stainless steel and busbars are tin-plated copper.

Drawing

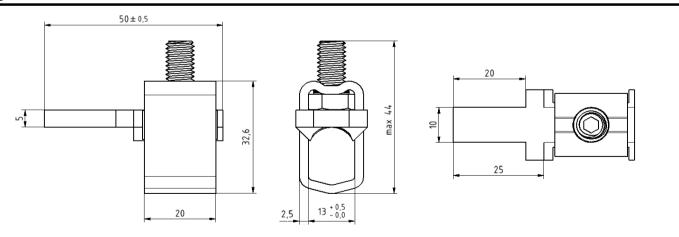

Package										
Package	Вох	pcs/ package	15	Weight [Kg]	1,09					
Length [mm]	85	Width [mm]	144	Height [mm]	85					