

Product data

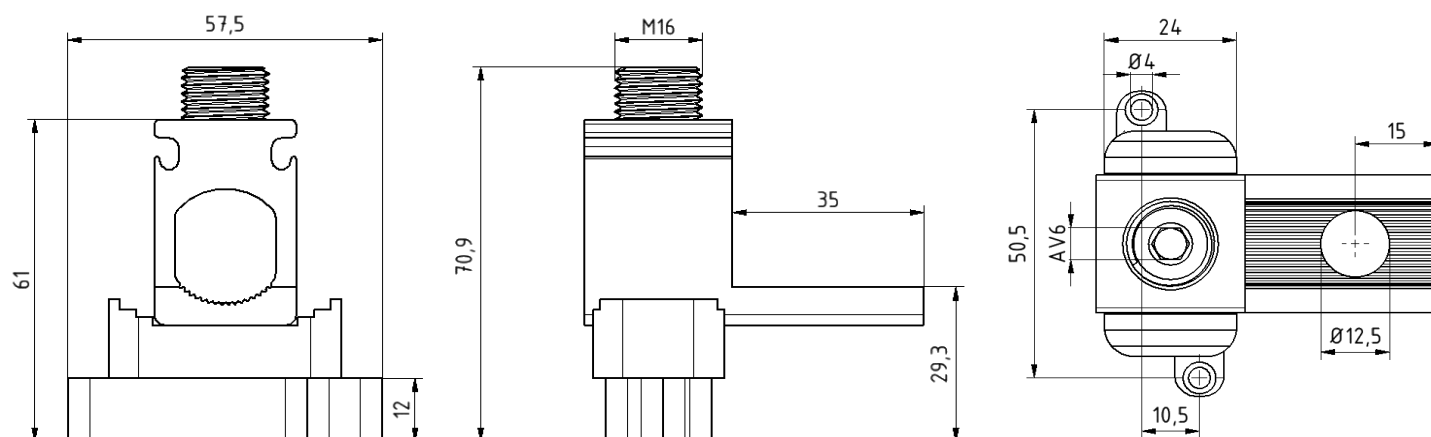
Product code	VC04-0008	STK-code	5202435	EAN-code	6410052024352
Product name	Insulated Universal connector 1xAl/Cu 25-150mm ²				
Wires	1xAl/Cu 25-150mm ²				

Technical data

Nominal current	Cu	320	A
	Al	290	A
Nominal voltage		690	V
Max. Current (US)	Cu	-	A
	Al	-	A
Max. Voltage (US)		-	V
Number of pole		1	pcs
Max. Cross section		150	mm ²
Tightening torque	25-50 mm ²	14	Nm
	70-150 mm ²	30	Nm
	-	-	Nm
	-	-	Nm
Max. Operating temperature		80	°C
Weight		74	g
IP-protection		-	
Standards	EN 61238-1:2003		
Color/ Material	Tin plated aluminium/ Black PA66		
Mounting/ Connection	Screw M4		


Description

OTE-connectors are designed to be used connecting aluminium and copper conductors to equipment.

Drawing

Package

Package	Box	pcs/ package	20	Weight [Kg]	1,60
Length [mm]	300	Width [mm]	205	Height [mm]	100