

# H-102 SERIES

## TALLY COUNTERS



H-102



H-102B



H-102M-6

- **HAND ACTUATED TALLY COUNTER**
- **4 DIGITS DISPLAY**
- **KNOB TYPE RESET**
- **DURABLE CHROME PLATED STEEL CASE**
- **HAND, DESK, MULTIPLE TYPES (2-10)**
- **IDEAL FOR TRAFFIC SURVEYING, HUMAN TRAFFIC SURVEY, ATTENDANCE CHECK, PASSENGER CHECK, RELIGIOUS PURPOSES, LABORATORY PURPOSES**

### ■ MODEL SELECTION


| MODEL     | DIGITS | MOUNTING | NO. OF UNITS | WEIGHT    |
|-----------|--------|----------|--------------|-----------|
| H-102     | 4      | HAND     | 1            | 61 grams  |
| H-102B    |        | DESK     | 1            | 68 grams  |
| H-102M-2  |        |          | 2            | 157 grams |
| H-102M-3  |        |          | 3            | 236 grams |
| H-102M-4  |        |          | 4            | 314 grams |
| H-102M-5  |        |          | 5            | 392 grams |
| H-102M-6  |        |          | 6            | 472 grams |
| H-102M-7  |        |          | 7            | 550 grams |
| H-102M-8  |        |          | 8            | 628 grams |
| H-102M-9  |        |          | 9            | 707 grams |
| H-102M-10 |        |          | 10           | 785 grams |

### ■ SPECIFICATIONS


|                       |                                         |
|-----------------------|-----------------------------------------|
| Display               | 6.0 × 3.5mm (White on Black Background) |
| Reset                 | Manual (knob)                           |
| Input/Count Method    | Hand actuated (count lever pushing)     |
| Count Speed           | 200 counts per minute                   |
| Operating Life        | Beyond 5 million counts (MIL-STD-105)   |
| Operating Temperature | -5°C ~ +40°C (Non-Freezing)             |
| Operating Humidity    | 85%RH maximum (Non-Condensing)          |

## **DIMENSIONS**



**H-102**

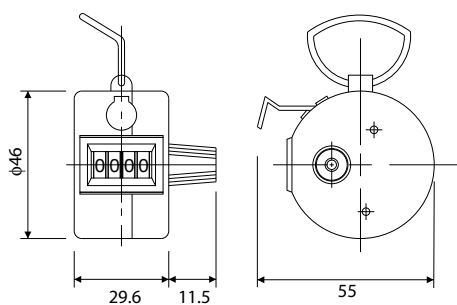

**H-102B**

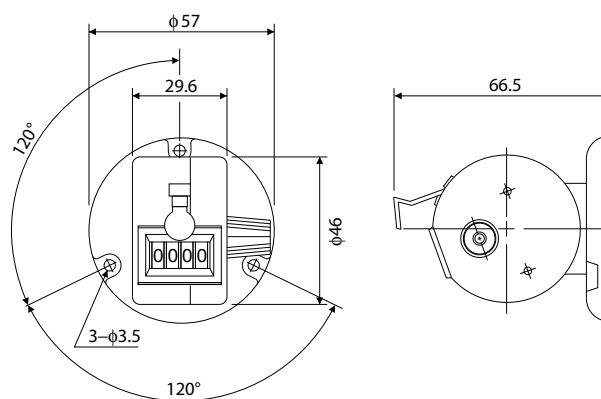

**H-102M - □**

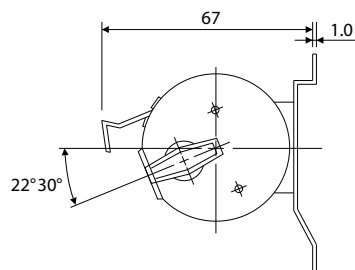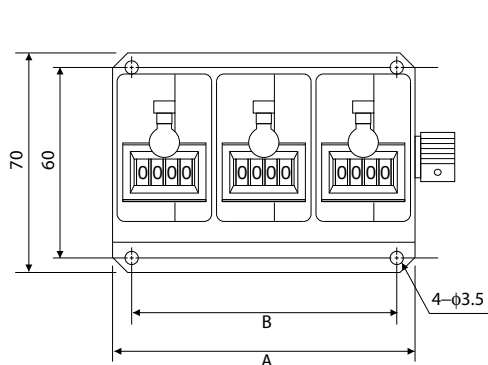

| Model     | Dimensions |       |
|-----------|------------|-------|
|           | A          | B     |
| H-102M-2  | 62.5       | 52.5  |
| H-102M-3  | 91.0       | 81.0  |
| H-102M-4  | 121.0      | 111.0 |
| H-102M-5  | 150.0      | 140.0 |
| H-102M-6  | 180.5      | 170.5 |
| H-102M-7  | 210.0      | 200.0 |
| H-102M-8  | 239.5      | 229.5 |
| H-102M-9  | 269.0      | 259.0 |
| H-102M-10 | 298.5      | 288.5 |