


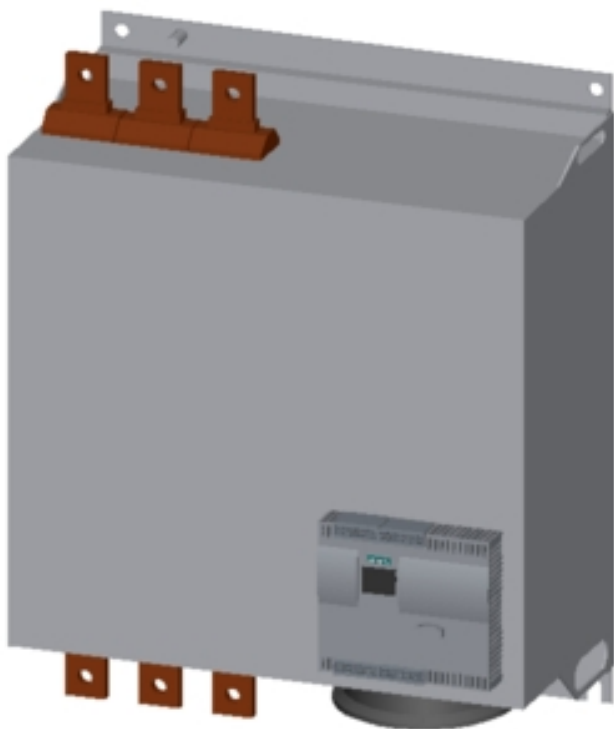

SIRIUS SOFT STARTER, VALUES AT 400V, 40DEG.,
STANDARD: 780A, 450KW, INSIDE-DELTA CIRCUIT
3: 1351A, 800KW, 200-460V AC, 230V AC, SPRING
TERMINALS

General technical data:		
product brand name		SIRIUS
Product feature		
• integrated bypass contact system		Yes
• Thyristors		Yes
Product function		
• Intrinsic device protection		Yes
• motor overload protection		Yes
• Evaluation of thermistor motor protection		Yes
• External reset		Yes
• Adjustable current limitation		Yes
• inside-delta circuit		Yes
Product component Motor brake output		Yes
Equipment marking acc. to DIN EN 61346-2		Q
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G
Power Electronics:		
Product designation		soft starters for high feature applications

Operating current		
• at 40 °C Rated value	A	780
• at 50 °C Rated value	A	693
• at 60 °C Rated value	A	615
Operating current for three-phase motors at 3-phase root switching		
• at 40 °C Rated value	A	1 351
• at 50 °C Rated value	A	1 200
• at 60 °C Rated value	A	1 065
Mechanical power output for three-phase motors		
• at 230 V		
— at standard circuit at 40 °C Rated value	W	250 000
— at 3-phase root switching at 40 °C Rated value	W	450 000
• at 400 V		
— at standard circuit at 40 °C Rated value	W	450 000
— at 3-phase root switching at 40 °C Rated value	W	800 000
yielded mechanical performance [hp] for three-phase AC motor at 200/208 V at standard circuit at 50 °C Rated value	hp	200
Operating frequency Rated value	Hz	50 ... 60
Relative negative tolerance of the operating frequency	%	-10
Relative positive tolerance of the operating frequency	%	10
Operating voltage at standard circuit Rated value	V	200 ... 460
Relative negative tolerance of the operating voltage at standard circuit	%	-15
Relative positive tolerance of the operating voltage at standard circuit	%	10
Operating voltage at 3-phase root switching Rated value	V	200 ... 460
Relative negative tolerance of the operating voltage at 3-phase root switching	%	-15
Relative positive tolerance of the operating voltage at 3-phase root switching	%	10
Minimum load [% of IM]	%	8
Adjustable motor current for motor overload protection minimum rated value	A	156
Continuous operating current [% of I _e] at 40 °C	%	115
Active power loss at operating current at 40 °C during operation typical	W	214
Control electronics:		
Type of voltage of the control supply voltage		AC

Control supply voltage frequency 1 Rated value	Hz	50
Control supply voltage frequency 2 Rated value	Hz	60
Relative negative tolerance of the control supply voltage frequency	%	-10
Relative positive tolerance of the control supply voltage frequency	%	10
Control supply voltage 1 at AC		
• at 50 Hz Rated value	V	230
• at 60 Hz Rated value	V	230
Relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-15
Relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
Display version for fault signal		Display

Mechanical data:

Width	mm	510
Height	mm	640
Depth	mm	290
Mounting type		screw fixing
mounting position		bei senkrechter Montageebene +/-90° drehbar, bei senkrechter Montageebene +/- 22,5° nach vorne und hinten kippbar
Required spacing with side-by-side mounting		
• upwards	mm	100
• at the side	mm	5
• downwards	mm	75
Installation altitude at height above sea level	m	5 000
Cable length maximum	m	500
Number of poles for main current circuit		3

Connections/ Terminals:

Type of electrical connection		
• for main current circuit		busbar connection
• for auxiliary and control current circuit		spring-loaded terminals
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		3
Number of CO contacts for auxiliary contacts		1
Type of connectable conductor cross-section for DIN cable lug for main contacts		
• finely stranded		50 ... 240 mm ²
• stranded		70 ... 240 mm ²
Type of connectable conductor cross-section for auxiliary contacts		
• solid		2x (0.25 ... 1.5 mm ²)

finely stranded with core end processing	2x (0.25 ... 1.5 mm ²)
Type of connectable conductor cross-section for AWG conductors - for main contacts - for auxiliary contacts	2/0 ... 500 kcmil 2x (24 ... 16)

Ambient conditions:		
Ambient temperature		
during operation	°C	60
during storage	°C	-25 ... +80
Derating temperature	°C	40
Protection class IP		IP00

Certificates/ approvals:		
General Product Approval	EMC	Declaration of Conformity
 CCC	 EAC	 EG-Konf.
 CSA	 UL	 C-TICK

Test Certificates	Shipping Approval	other
spezielle Prüfbescheinigungen n	 ABS	Umweltbestätigung
	 DNV	
	 LRS	

UL/CSA ratings:		
yielded mechanical performance [hp] for three-phase AC motor		
at 200/208 V - at 3-phase root switching at 50 °C Rated value	hp	450
at 220/230 V - at standard circuit at 50 °C Rated value - at 3-phase root switching at 50 °C Rated value	hp hp	250 500
at 460/480 V - at standard circuit at 50 °C Rated value - at 3-phase root switching at 50 °C Rated value	hp hp	600 1 050
Contact rating of the auxiliary contacts acc. to UL		B300 / R300

Further information

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW44562BC44>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW44562BC44>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW44562BC44&lang=en

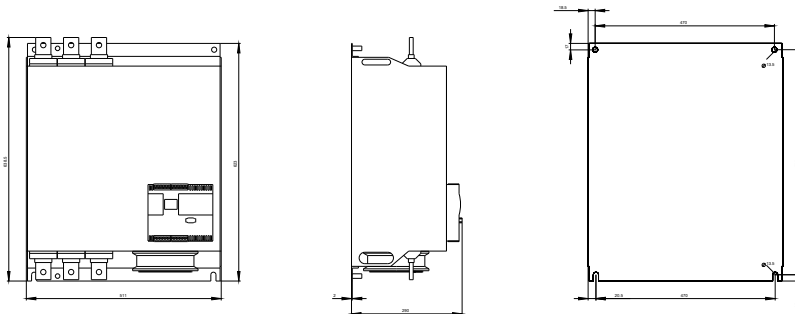

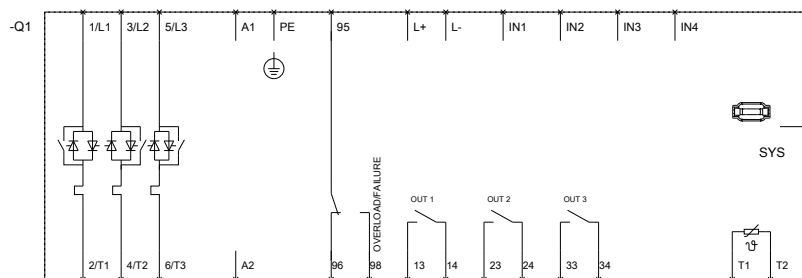

last modified:

17.07.2015