

Area of Application:

Table mounted
Water

Max. working pressure 10 bar
Temperature range 5°C-65°C

Details:

Servo controlled bi-stable cartridge valve
Swivel limited 110°
Aerator M22x1

Materials in media contact:

Brass
Rubber, EPDM
Silicone based lubricant
PPSU
SS
PA
SPX Hose

Mounting:

M30x1,5 nut with locking pins o-ring and washer (See 94G0232)

Inlet / outlet connection:

Union Nut G1/2"
Aerator M22x1

Battery connection:


6V Lithium Battery

Infrared sensor

Standard hose length 500mm



Cable length 300mm

Battery operated

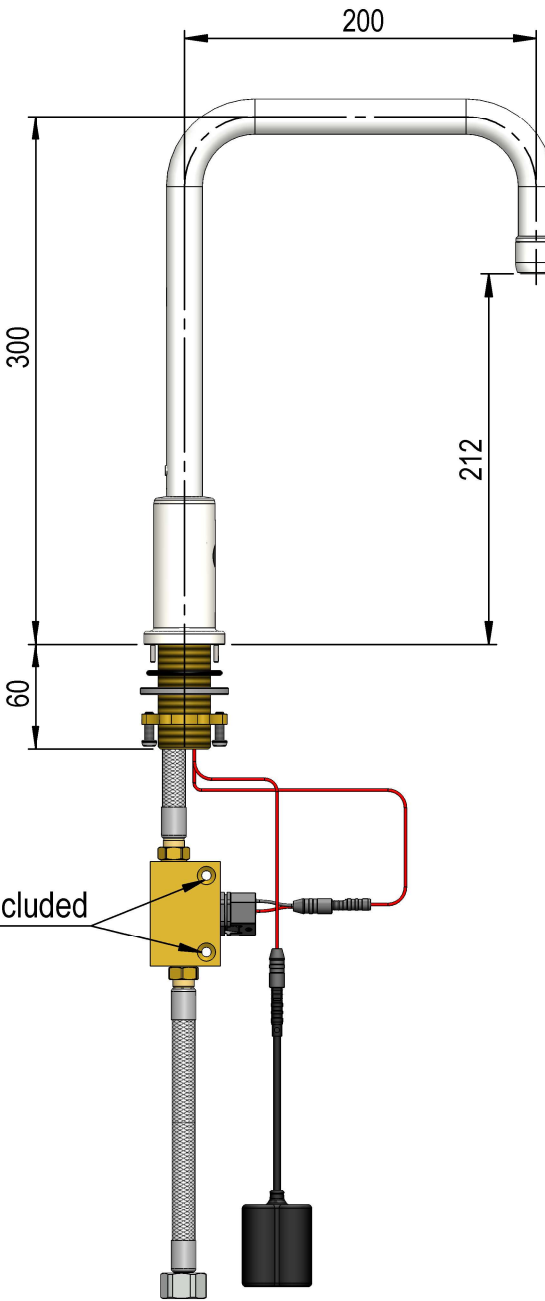

Aerator with 5L/min flowfix

M5 screws not included

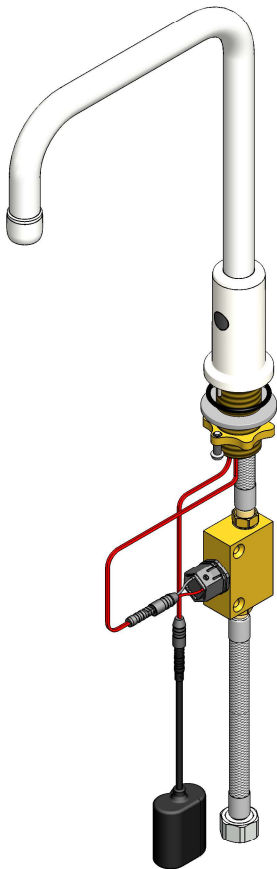

Description: 1-Valve, Table mounted, 1-Hole, Swivel limited 110°, M30x1,5mm

Media:		Water							
Comments:									
Drawing type:		Customer drawing							Weight:
									1.527 Kg

Rev.	Pos.	Date	TM No.	Design by	Drawn by	Change:

Designed by:	Drawn by:	Released on TM No.	Date:
REK	REK		29-04-2019

BROEN-LAB

This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.

Format: A3 Drawing No.: 26010081035-52E