


Steel-conduit-system
Hot dip galvanized (EN ISO 1461) – 4 m

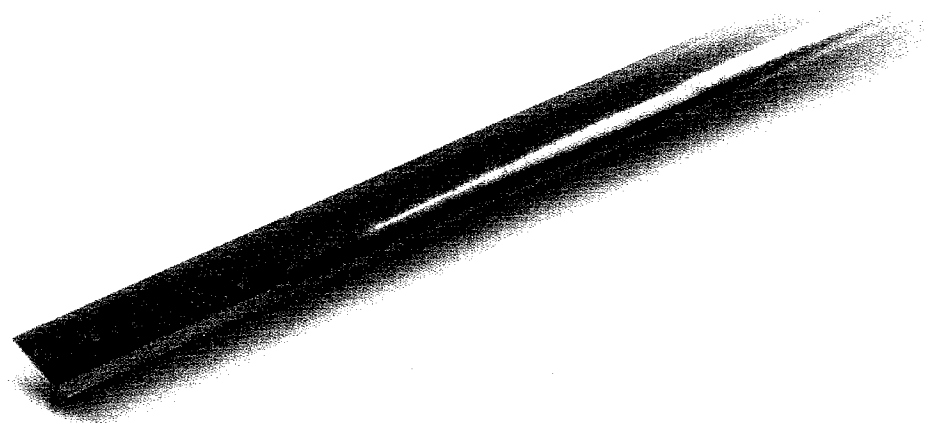

Produktinformation – technical leaflet

Material	mild steel rolled
Galvanized	inside and outside hot dip galvanized acc. to EN ISO 1461 Ø – zinc coating 70 my / 500 g/m ²
Approval:	VDE/ÖVE EN 61386-1 VDE/ÖVE EN 61386-21
Classification :	4 = compressive strenght (1250N/5cm) 4 = impact strenght (2kg/300cm) 5 = min. temperature - 45° C 7 = max. temperature + 400° C

Steel-conduit, hot dip galvanized, 4 m length

<i>Item number</i>	<i>Sign</i>	<i>ID-Ø in mm</i>	<i>OD- Ø in mm</i>
580216	Steelconduit 16 galvanized 4 meters ISSV 16-4	14	16
580220	Steelconduit 20 galvanized 4 meters ISSV 20-4	18	20
580225	Steelconduit 25 galvanized 4 meters ISSV 25-4	22,6	25
580232	Steelconduit 32 galvanized 4 meters ISSV 32-4	29,6	32
580240	Steelconduit 40 galvanized 4 meters ISSV 40-4	37,6	40
580250	Steelconduit 50 galvanized 4 meters ISSV 50-4	47,6	50
580263	Steelconduit 63 galvanized 4 meters ISSV 63-4	60,40	63

Tolerances according to DIN EN 60423

schramm TechTrade GmbH, Freistädter Straße 283 / Stock 6 / 27 | A-4040 Linz / Austria / Tel +43(0)732 / 30 11 12 Fax: +43(0)732/ 30 11 12-20
office@schramm.co.at | www.schramm-techtrade.com

Bankverbindung: Oberbank AG, BLZ: 15000, Kto.: 751-0640.64 / IBAN: AT52 1500 0007 5106 4064 / BIC: OBBKAT2L

VKB Bank, BLZ: 18600 / Kto.: 10.402.808 / IBAN: AT60 1860 0000 1040 2808 / BIC: VKBLAT2L

UID Nr.: ATU 47 98 86 00, EORI Nr.: ATEOS1000013574 / FN 188143g