

FJERNBETJENING

4 KANALS RF FJERNBETJENING



Varenr.:

VN22745

Udgangssignal:

Radio frekvens

Frekvens:

868 MHZ

Kanaler:

Fjernbetjening til en RF LED dæmper med 4 kanaler.

Forsyningsspænding:

3V (Batteri CR2025)

Rækkevide for fjernbetjening:

Max. 20 m

Tætningsklasse:

IP20

Omgivelsestemperatur:

-20°C ~ +40°C

Dimensioner:

137 x 39 x 11 mm

Kompatibel styringer:


VN22742 - 1 modtager kan parres med max. 8 forskellige fjernbetjening.



RF LED dæmper er ikke inkluderet.


Funktion:

Alle lys: Klik for at tænde, tryk og hold nede for at øge lysintensiteten.




Alle lys: Klik for at slukke, tryk og hold nede for at reducere lysintensiteten.

Kanal 1: Klik for at tænde, Tryk og hold nede for at øge lysintensiteten.




Kanal 1: Klik for at slukke, tryk og hold nede for at reducere lysintensiteten.

Kanal 2: Klik for at tænde, Tryk og hold nede for at øge lysintensiteten.




Kanal 2: Klik for at slukke, tryk og hold nede for at reducere lysintensiteten.

Kanal 3: Klik for at tænde, Tryk og hold nede for at øge lysintensiteten.




Kanal 3: Klik for at slukke, tryk og hold nede for at reducere lysintensiteten.

Kanal 4: Klik for at tænde, Tryk og hold nede for at øge lysintensiteten.



Kanal 4: Klik for at slukke, tryk og hold nede for at reducere lysintensiteten.



Bemærk: Fjern først beskyttelsesfilmen på batteriet inden ibrugtagning.

Foto:



Tilslutning

1. Parre med RF LED dæmperen:

Klik på "Learning Key" på RF LED dæmperen.



Klik på ON eller OFF knappen for alle lys.



LED-lys, der er forbundet med RF LED dæmperen, vil flimre en gang.



RF LED dæmperen er parret med fjernbetjeningen.

2. Sådan slettes parringen:

Tryk og hold "Learning Key" på RF LED dæmperen i mere end 3 sekunder, indtil de tilsluttede LED-lamper blinker to gange, hvilket betyder, at parringen er slettet korrekt.



REMOTE CONTROL

4 CHANNEL RF REMOTE

Item no:

VN22745

Output:

Radio Frequency

Working frequency:

868 MHZ

Channels:

Control 4 channels of one receiver separately

Working Voltage:

3V (Battery CR2025)

RF Remote distance:

Max. 20 m

IP Protection class:

IP20

Working temperature:

-20°C ~ +40°C

Dimensions:

137 x 39 x 11 mm

Compatible controller:

VN22742 or with all universal series RF receivers.

1 receiver can be paired by max. 8 different remote controls.



Dimmer Controller is not included.

Function:


All lights: Click to turn on, Press and hold down to increase light intensity.

Channel 1: Click to turn on, Press and hold down to increase light intensity

Channel 2: Click to turn on, Press and hold down to increase light intensity

Channel 3: Click to turn on, Press and hold down to increase light intensity

Channel 4: Click to turn on, Press and hold down to increase light intensity

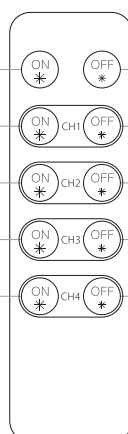

All lights: Click to turn off, Press and hold down to decrease light intensity.

Channel 1: Click to turn off, Press and hold down to decrease light intensity.

Channel 2: Click to turn off, Press and hold down to decrease light intensity.

Channel 3: Click to turn off, Press and hold down to decrease light intensity.

Channel 4: Click to turn off, Press and hold down to decrease light intensity.

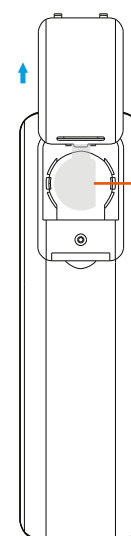


Photo:



Operation

1. Pair with RF receivers:

Click "Learning Key" on RF receiver



Click ON or OFF button of all lights.



LED lights connected with the receiver will flicker once.



The receiver is paired with remote successfully.

2. How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.