

THDEX

Denomination: **THDEX ANCHOR**

Codes: **THDEX, THDAV, THPAN, THTRU**

Reference: **FT THDEX-en**

Date: **06/06/2016**

Revision: 3

Page: **1 out 6**



THDEX



THDAV



THPAN



THTRU



CHARACTERISTICS

- Pilot hole needed; thread is created by the anchor during the installation process.
- Functioning by thread - concrete mechanical interlock.
- Use for medium loads.
- Direct installation, not torque wrench needed.
- It can be removed, leaving concrete surface flat.
- Use in cracked and uncracked concrete.
- Use for static or cuasi-static loads.
- Suitable when reduced edge distances or anchor spacing required
- Approved for fire resistance R30 to R120
- Silver ruspert coating


APPLICATIONS

- Structural fixings in cracked and uncracked concrete in indoor conditions.
- Glazing, windows and storefronts
- Racking and shelving
- Attaching railings, handrails and ledgers (inside environment).
- Fixings of steel beams, channels, machinery, boilers, signals, stadium seatings, façade substructures, channels, etc.
- Fixings of wood structures to concrete.

View web profile:




BASE MATERIALS

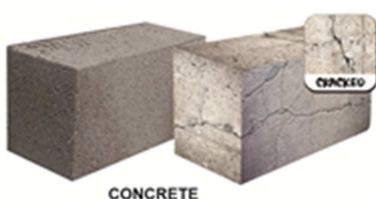

CONCRETE

RECOMMENDED TENSION RESISTANCES IN UNCRACKED CONCRETE [kg]

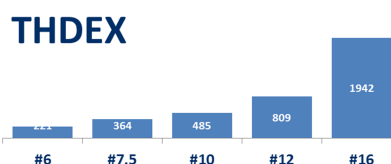

SIZES

#6 – #16

DRILL CONDITION



THDEX

Denomination: **THDEX ANCHOR**

Codes: **THDEX, THDAV, THPAN, THTRU**


Reference: **FT THDEX-en**

Date: **06/06/2016**

Revision: 3

Page: **2 out 6**


APPLICATION EXAMPLES

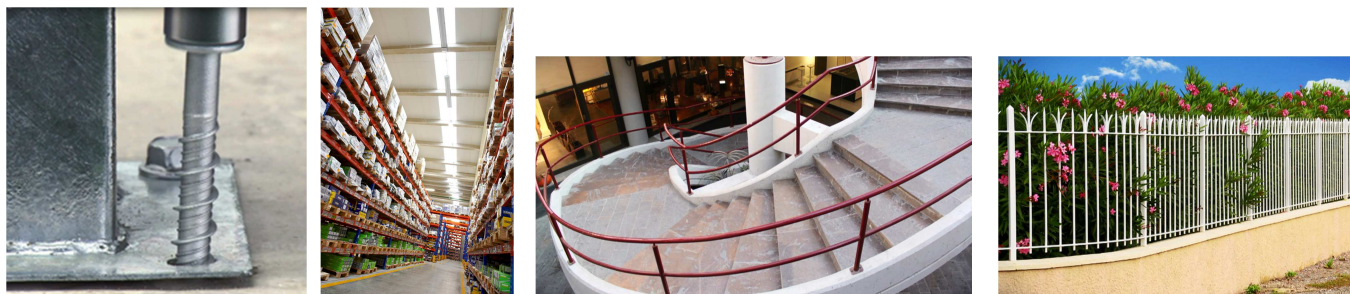

1. RANGE

ITEM	CÓDE	SIZE	PICTURE	COMPONENT	MATERIAL
1	THDEX	#6 to #16		Hexagonal concrete screw	Carbon steel, silver ruspert coating
2	THDAV	#7.5		Countersunk concrete screw	Carbon steel, silver ruspert coating
3	THPAN	#7.5		Pan head concrete screw	Carbon steel, silver ruspert coating
4	THTRU	#7.5		Truss head concrete screw	Carbon steel, silver ruspert coating

2. INSTALLATION DATA

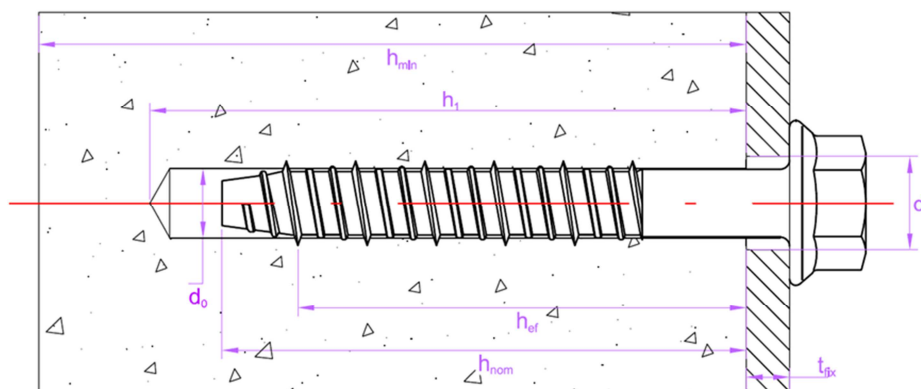

THDEX

Denomination: **THDEX ANCHOR**

Codes: **THDEX, THDAV, THPAN, THTRU**

Reference: **FT THDEX-en**

Date: **06/06/2016**

Revision: 3

Page: **3 out 6**

Code	Head version	ETA approved	d ₀ : drill bit	d _f : clearance hole in fixture	sw: spanner / drill bit	h _{min} : minim thickness of concrete member	h ₁ : depth drill hole	h _{nom} : embedment depth	h _{ef} : effective depth	T _{ins} : installation torque	t _{fix} : fixture thickness	s _{cr} : critical spacing	c _{cr} : critical edge distance	s _{min} : minimum spacing	C _{min} : minimum edge distance		
			[mm]	[mm]	[-]	[mm]	[mm]	[mm]	[mm]	[Nm]	[mm]	[mm]	[mm]	[mm]	[mm]		
THDEX06030	Hexagonal		5	7	8	100	40	33	20	7	2	102	51	45	45		
THDEX06040									12								
THDEX06050									5								
THDEX06060									15								
THDEX07035	Hexagonal		6	9	10	100	43	33	20	20	2	126	63	45	45		
THDEX07045									12								
THDEX07060		✓							5								
THDEX07080		✓							25								
THDEX07100		✓							45								
THDEX10055	Hexagonal		8	12	13	100	60	50	35	50	5	135	67	50	50		
THDEX10065		✓							5								
THDEX10075		✓							15								
THDEX10090		✓							30								
THDEX10110		✓							50								
THDEX10130		✓							70								
THDEX12065	Hexagonal		10	14	15	100	75	60	42	80	5	156	78	60	60		
THDEX12075		✓						5									
THDEX12085		✓						15									
THDEX12100		✓						30									
THDEX12120		✓						50									
THDEX12140		✓						70									
THDEX16080	Hexagonal		14	18	18	102	95	75	51	120	5	258	129	100	100		
THDEX16115		✓						5									
THDEX16135		✓						25									
THDEX16160		✓						50									
THDAV07072	Countersunk	✓	6	9	T30	100	65	55	42	20	17	126	63	45	45		
THDAV07092		✓															37
THDAV07112		✓															57
THDAV07132		✓															77
THDAV07152		✓															97
THPAN07050	Pan		6	9	T40	100	43	33	20	20	17	126	63	45	45		
THTRU07050	Truss		6	9	T30	100	43	33	20	20	17	126	63	45	45		

Critical distances are those where anchors in an anchor group are not influenced by one another with regard to tension load effects. For smaller distances, down to minimum distances, corresponding reduction coefficients must be applied.

THDEX

Denomination: **THDEX ANCHOR**

Codes: **THDEX, THDAV, THPAN, THTRU**


Reference: **FT THDEX-en**

Date: **06/06/2016**

Revision: 3


Page: **4 out 6**

4. PRODUCT INSTALLATION




1. DRILLING

Check the concrete base is compact and porosity is insignificant.
Suitable for wet, dry or flooded drill holes.
Use drill in hammer mode.
Drill to the specified diameter and depth values




2. BLOW AND CLEAN

Clear the drill holes completely of dust and fragments
Use air pump and brush.



3. INSTALL

The installation shall be done through the fixture baseplate.
Anchor could be installed using a torque wrench applying the nominal installation torque or by using an electrical impact driven; power input: 500 W, torque 50 - 250 Nm (e.g: Bosch GDS 18E).
Once installed it can be verified the total length of the anchor through the letter on bolt tip



5. RESISTANCES

Characteristic resistances for C20/25 concrete for an isolated anchor (without considering anchor-to-anchor or anchor-to-edge distance effects).

THDEX

Denomination: **THDEX ANCHOR**

Codes: **THDEX, THDAV, THPAN, THTRU**

Reference: **FT THDEX-en**

Date: **06/06/2016**

Revision: 3

Page: **5 out 6**

Code	Head version	ETA approved	Tension resistance in C20/25 concrete		Coefficient for higher concrete types			Tension partial safety factor	Shear resistance in concrete		Shear partial safety factor	
			Uncracked	Cracked	C30/37	C40/45	C50/60		Uncracked	Cracked	Uncracked	Cracked
			N _{RK} [kN]	N _{RK} [kN]	Ψ [-]	Ψ [-]	Ψ [-]	γ _M [-]	V _{RK} [kN]	V _{RK} [kN]	γ _M [-]	γ _M [-]
THDEX06030	Hexagonal		3.2	--	1.22	1.41	1.55	1.8	4.5	--	1.50	--
THDEX06040												
THDEX06050			5.5						7.1		1.25	
THDEX06060												
THDEX07035	Hexagonal		4.3	--	1.22	1.41	1.55	1.8	4.5	--	1.50	--
THDEX07045												
THDEX07060		✓	9	6	1.22	1.41	1.55	1.8	7.5	7.5	1.25	1.25
THDEX07080		✓										
THDEX07100		✓										
THDEX10055	Hexagonal		9,3	--					10,4	--	1,50	--
THDEX10065		✓										
THDEX10075		✓										
THDEX10090		✓	12	9	Uncrack: 1.08 Cracked: 1.22	Uncrack: 1.15 Cracked: 1.41	Uncrack: 1.19 Cracked: 1.55	1.8	15,2	10,9	1.50	1.50
THDEX10110		✓										
THDEX10130		✓										
THDEX12065	Hexagonal		16.1	--					13.7	--	1.50	--
THDEX12075		✓										
THDEX12085		✓										
THDEX12100		✓	20	12	Uncrack: 1.04 Cracked: 1.22	Uncrack: 1.07 Cracked: 1.41	Uncrack: 1.09 Cracked: 1.55	1.8	18,9	13,5	1.50	1.50
THDEX12120		✓										
THDEX12140		✓										
THDEX16080	Hexagonal		23.7	--	Uncrack: 1.04 Cracked: 1.12	Uncrack: 1.07 Cracked: 1.23	Uncrack: 1.09 Cracked: 1.30	1.5	36.7	--	1.50	--
THDEX16115		✓										
THDEX16135		✓	40	30					57.9	57.4	1.25	1.50
THDEX16160		✓										
THDAV07072	Countersunk	✓										
THDAV07092		✓										
THDAV07112		✓	9	6	1.22	1.41	1.55	1.8	7.5	7.5	1.25	1.25
THDAV07132		✓										
THDAV07152		✓										
THPAN07050	Pan		4.3	--	1.22	1.41	1.55	1.8	4.5	--	1.50	--
THTRU07050	Truss		4.3	--	1.22	1.41	1.55	1.8	4.5	--	1.50	--

1 kN ≈ 100 kg

A load safety factor of $\gamma_F = 1,4$ is recommended

Design example:

Fixing a tension load of 500 kg (= 4,91 kN) in C30/37 cracked concrete using a THDEX #12 anchor.

Check to be done: Design load < Design resistance

Design load = service load * load safety factor = 4,91 * 1,4 = 6,87 kN

Design resistance = characteristic resistance * concrete coefficient / tension partial safety coefficient = 12 * 1,22 / 1,8 = 8.13 kN

Check: 6,87 < 8.13 kN: anchorage is safe

For complex anchor designs we recommend our anchor design software INDEXcal

THDEX

Denomination: **THDEX ANCHOR**Codes: **THDEX, THDAV, THPAN, THTRU**Reference: **FT THDEX-en**Date: **06/06/2016**

Revision: 3

Page: **6 out 6**

6. OFFICIAL DOCUMENTATION

The following documents are available through our Sales Department or on our official website: www.indexfix.com

- European Technical Assessment ETA 15/0017 for use in concrete, according to ETAG 001 guideline, option 1, from #7.5 to #16
- Declaration of Performances: DoP THDEX-en
- Certificate of constancy of performances: 1219-CPR-0091.
- INDEXcal: anchor calculation software.