

BD2A-400-EE-KR BD2A FEEDER UNIT 400A FOR MULTI CORE
CABLE WITH CABLING BOX

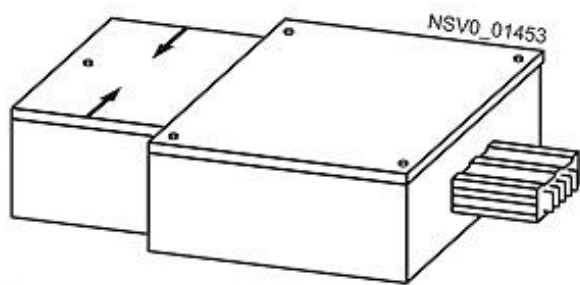


Figure similar

Model	
Product designation	feeder unit for BD2 busbar trunking system
Protection class	
Protection class IP	IP54
Main circuit	
Operating frequency / rated value	
• minimum	50 Hz
• maximum	60 Hz
Operating voltage / at AC	
• at 50 Hz / rated value / maximum	690 V
• at 60 Hz / rated value / maximum	690 V
Operating current	
• for circuit 1 / at AC / at 50 Hz / rated value / maximum	400 A
• for circuit 1 / at AC / at 60 Hz / rated value / maximum	400 A

Connections

Connectable conductor cross-section / in the feeder box

- minimum 10 mm²
- maximum 240 mm²

Mechanical Design

Height	200 mm
Width	462 mm
Length	853 mm
Mounting type	ceiling / wall
Material / of the busbar	aluminium

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:611095>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:611095>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:611095

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>