



BLACK LINE

PP2RJ45BL

NICKEL LINE

PP2RJ45NL

RJ45 SOCKET



RJ45 connector in a standard 22 mm diameter block plug and play. It makes possible to bring the Ethernet networks through an electrical panel without open it. The protection rubber cap integrated remains joined to the device to avoid to be lost and prevents any water or dirt from penetrating inside.


Marking **CE**

TECHNICAL DATA

Protection Degree: IP65 (IEC 60529)
Ambient Temperature: -25°C +75°C
Connection: RJ45

Standard reference: IEC 60947-1, IEC 60947-5-1, IEC 60204-1, EN 60947-1, EN 60947-5-1, EN 60204-1

Directive reference: Low Voltage Directive 2006/95/EC, Machinery Directive 2006/42/EC and EMC Directive 2004/108/EC.

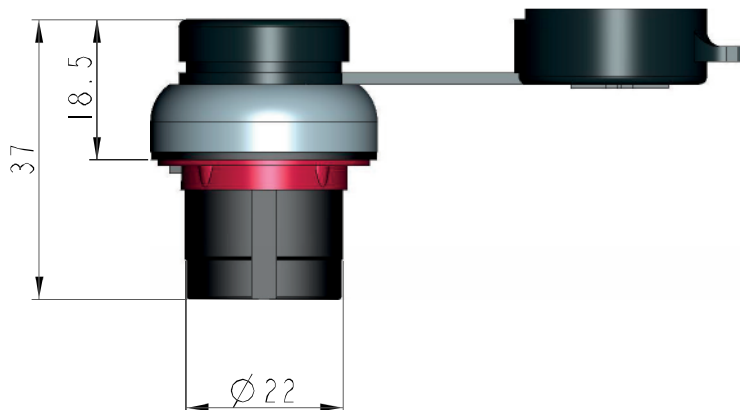

BLACK LINE

PP2USB20BL
PP2USB30BL

NICKEL LINE

PP2USB20NL
PP2USB30NL

USB SOCKET



USB socket in a standard 22 mm diameter block plug and play. It makes possible to transfer data and electricity through an electrical panel without open it. The protection rubber cap integrated remains joined to the device to avoid to be lost and prevents any water or dirt from penetrating inside.


Marking **CE**

TECHNICAL DATA

Protection Degree: IP65 (IEC 60529)
Ambient Temperature: -25°C +75°C
Connection: USB 2.0 - USB 3.0

Standard reference: IEC 60947-1, IEC 60947-5-1, IEC 60204-1, EN 60947-1, EN 60947-5-1, EN 60204-1

Directive reference: Low Voltage Directive 2006/95/EC, Machinery Directive 2006/42/EC and EMC Directive 2004/108/EC.

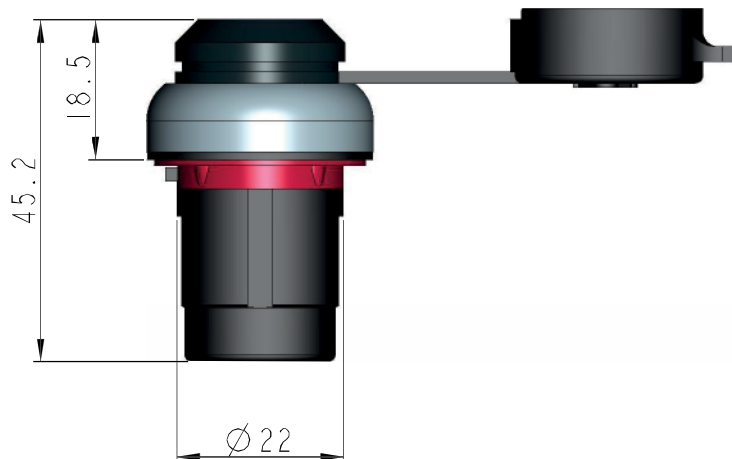

USB 2.0

The USB 2.0 socket takes advantage of the standard data transfer speed.

It is the most frequently used on the market and furthermore this option offers the best value for money.

USB 3.0

The connection USB 3.0 is the latest generation of data transfer on the market. This solution offers the maximum data transfer speed and the socket is backward compatible with previous USB connectors.

Bernstein A/S
Sønderhede 30
DK-8240 Risskov

Telefon +45 70 20 05 22
Telefax +45 70 20 05 27
e-mail: bernstein@bernstein.dk

CVR-Nr. 18 66 46 07
Reg. Nr. 222 740
www.bernstein.dk