## SIEMENS

## **Product data sheet**

5SY4632-8



Similar to image

Technical data:		
Overvoltage class		3
type of voltage	_	AC/DC
Tripping characteristic class		D
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		4
Number of pitch units for width		4
Product function / n-switching		Yes
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	20
Breaking capacity current / acc. to EN 60898 / rated value	kA	10
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	32
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

CIRCUIT BREAKER 400V 10KA, 3+N-POLE, D, 32A, D=70MM

Operational voltage Um	_	-
rated current In	_	-
Rated make-break capacity Icn	_	-
Rated service short-circuit breaking capacity Ics		-
Rated ultimate short-circuit breaking capacity Icu	_	-
Tripping characteristics Number		-
Tripping characteristic/-class Conventional tripping current I2, (x In)		-
rated current In IEC, DIN/VDE	_	-
Tripping characteristic/-class Test current I4, hold (x In)		-
rated current In / IEC, DIN/VDE		
• at 30 Cel	А	32
• at 40 Cel	А	30.4
• at 45 Cel	А	29.76
• at 50 Cel	А	28.8
• at 55 Cel	А	27.84
• at 60 Cel	А	27.2
Resistance against shock / according to IEC 60068-2-27		150m/s <sup>2</sup> at 11ms half-sine

 Certificates/approvals:

 General Product Approval

 IMQ
 ROSTEST
 Implicates/approval

 Copy opposition
 ROSTEST
 other

 Shipping Approval
 Implicates/approval
 other

 Implicates/approval
 Implicates/approval
 Implicates/approval

 Further information:
 Implicates/approval
 Implicates/approval

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/5SY4632-8/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=5SY4632-8

CAx-Online-Generator

http://www.siemens.com/cax

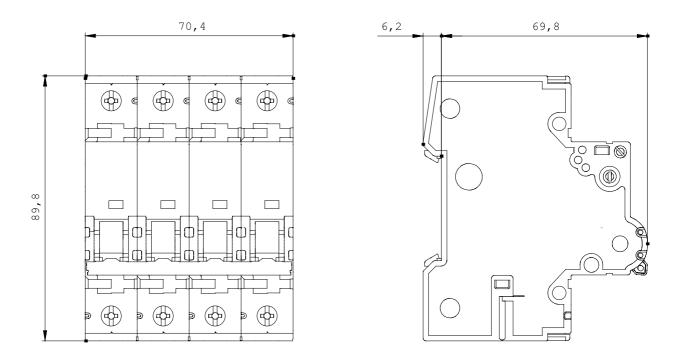

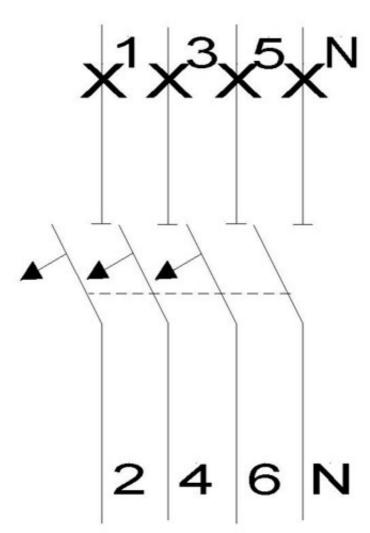

last change: