



SMA Plug Crimp 50Ω SMA3100-L400

Egnede kabler:
LMR400


Vægt: 34,22g



EAN: 5704717003600

JYEBAO
SMA3100-L400


Parts	Material	Plating(Micro-inch)
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Brass	Gold 20 Over Nickel 50 Over Copper 50
Renbrock Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

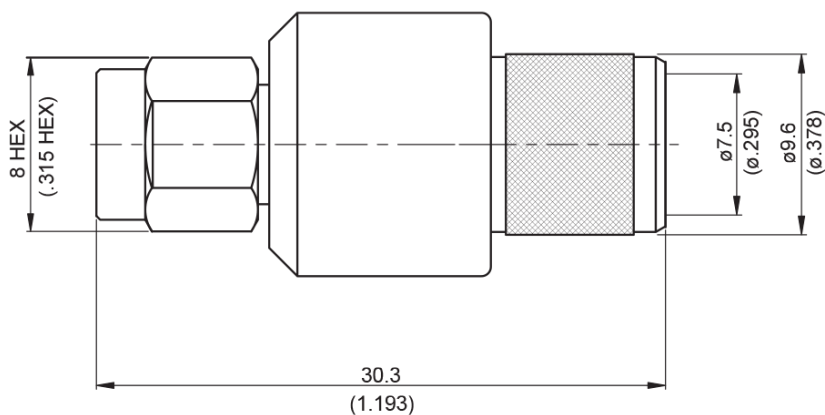

CABLE ASSEMBLY INSTRUCTION

SMA3100-L400

JYE BAO CO., LTD.
TAIPEI TAIWAN R.O.C

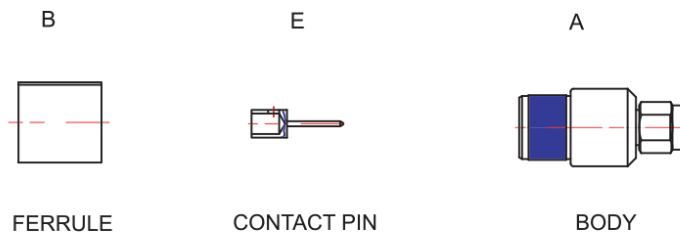

FERRULE

CONTACT PIN

BODY

DIAGRAM	ASSEMBLY INSTRUCTION
	Step 1: STRIP
	Step 2: SLIDE FERRULE 'B' OVER CABLE. Step 3: PUT PIN 'E' ON CENTER CONDUCTOR AND SOLDER IN "Y".
	Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR 'A' IN PLACE.
	Step 5: SLIDE FERRULE 'B' TOWARDS THE CONNECTOR 'A' AND CRIMP.

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.