



SMA Jack 50Ω SMA8100-0058

Egnede kabler:
RG58, LMR195


Vægt: 2,74g



EAN: 5704717004386

JYEBAO
SMA8100-0058

Parts	Material	Plating (Micro-inch)
Ferrule	Brass	Gold 5 Over Nickel 50 Over Copper 50
Contact Pin	Beryllium Copper	Gold 20 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Brass	Gold 5 Over Nickel 50 Over Copper 50

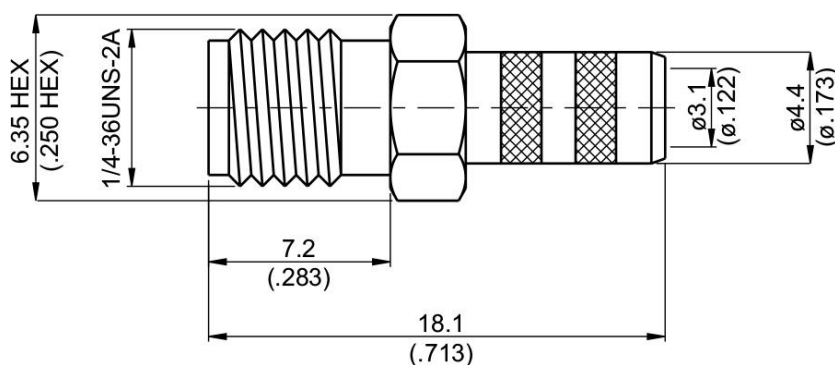

CABLE ASSEMBLY INSTRUCTION

SMA8100-0058

JYE BAO CO., LTD.

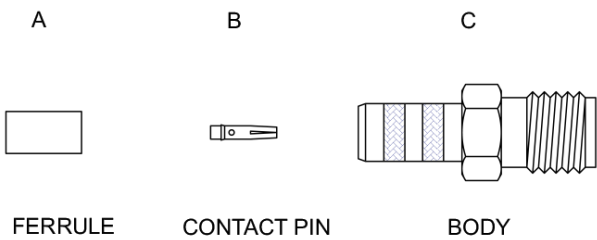


DIAGRAM	ASSEMBLY INSTRUCTION
Diagram showing a cable with stripping dimensions: 12.0 [472] for the outer jacket, 4.1 [161] for the braid, and 2.5 [98] for the center conductor.	Step 1: STRIP AS SHOWN.
Diagram showing the ferrule (A) being slid over the cable and the contact pin (B) being inserted into the center conductor (Y).	Step 2: SLIDE FERRULE "A" OVER CABLE. Step 3: PUT PIN "B" ON CENTER CONDUCTOR AND SOLDER IN "Y".
Diagram showing the connector body (C) being slid over the cable assembly.	Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR "C" IN PLACE.
Diagram showing the ferrule (A) being slid towards the connector body (C) and crimped.	Step 5: SLIDE FERRULE "A" TOWARDS THE CONNECTOR "C" AND CRIMP.

This part number complies with RoHS.
Notice: JYEBAO reserves the right to make modifications deemed appropriate.