



Sample image

## Datasheet

**Article number:** 70010235

**Designation:** KG64.T203/40.KL11V

**Description:** Switchgear

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
690 AC						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C) additional requirements				
63	50	55 Ambient temperature +50°C during 24 hours with peaks up to +55°C				
Rated operational current Ie						
Utilization category			Voltage (V)		Current (A)	
AC-32A			20 - 400		63	
Rated operational power						
Utilization category	Voltage (V)	No. of phases		No. of poles		Power (kW)
AC-3	220 - 240	3		3		11
AC-3	380 - 440	3		3		18,50
AC-3	660 - 690	3		3		15
AC-23A	220 - 240	3		3		11
AC-23A	380 - 440	3		3		22
AC-23A	660 - 690	3		3		18,50
Max. Fuse rating IEC						
Fuse characteristic			No. of Fuses		Current (A)	
gG			1		63	
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C) Additional Text				
60		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	3	40
DOL		220 - 240	1	2	7,50	40
DOL		277 - 277	1	2	7,50	40
DOL		415 - 415	1	2	10	40
DOL		440 - 480	1	2	15	40
DOL		550 - 600	1	2	15	40
DOL		110 - 120	3	3	5	40
DOL		220 - 240	3	3	15	40
DOL		415 - 415	3	3	20	40
DOL		440 - 480	3	3	30	40
DOL		550 - 600	3	3	40	40
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 70A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
60 - 75			-- --			
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						

**General Information**
**Text**

- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

**CSA**
**Nominal Voltage**

Voltage (V) AC / DC  
600 AC

**Rated insulation voltage Ui**

Voltage (V) AC / DC  
600 AC

**Rated thermal current**

Current (A) Ambient temperature (°C) Additional Text  
60 0 - 40 -

**Horsepower rating**

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	3	40
DOL	220 - 240	1	2	7,50	40
DOL	277 - 277	1	2	7,50	40
DOL	415 - 415	1	2	10	40
DOL	440 - 480	1	2	15	40
DOL	110 - 120	3	3	5	40
DOL	220 - 240	3	3	15	40
DOL	415 - 415	3	3	20	40
DOL	440 - 480	3	3	30	40
DOL	550 - 600	3	3	40	40

**Temp. rating of wire**

Temperature rating (°C) Current (A) Text  
75 -- --

**General Use**

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	60	1	1	1
AC	600	60	1	2	1
AC	600	60	3	3	1

**GENERAL TECHNICAL INFORMATION**
**Size of conductor**

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
Solid wire	Min.	2	0.75mm²	Copper
Solid wire	Min.	1	1.5mm²	Copper
Flexible wire	Max.	1	AWG 6	Copper
Flexible wire	Min.	1	2.5mm²	Copper
Flexible wire	Max.	1	10mm²	Copper
Flexible wire	Min.	2	1.5mm²	Copper
Single-core or stranded wire	Max.	1	AWG 6	Copper
Single-core or stranded wire	Max.	1	16mm²	Copper
Flexible wire with sleeve	Max.	1	10mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2	0.75mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1	1.5mm²	Copper

**Stripping length**

Length (mm) --

12


**Recommended screw driver**

Type of screw driver	Value
Cross Screwdriver	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

**Tightening torque of screws**

tightening torque (Nm) tightening torque (lb-in)  
1,80 16

**Approbations**
**Specification**

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

**General Information**
**Text**

- EMC Note: This device is suitable for use in environment A and B.

**Marking**


## General Information

### Text

- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.

## Waste Electrical & Electronic Equipment (WEEE)

### Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at [www.krausnaimer.com](http://www.krausnaimer.com)

## Proposition 65

### Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

## Mounting-KL11V

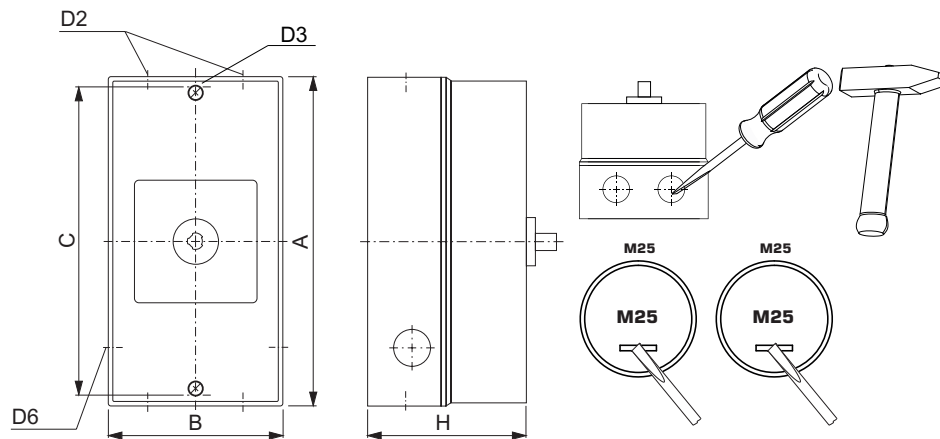


IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 5,00
A	H	190,00 mm
B	H	100,00 mm
C	H	178,00 mm
D2	Ø	4,00 x M25
D3	Ø	5,60 mm
D6	Ø	2,00 x M25
H	H	93,00 mm




Wiring diagram

KG64.T303.KL11V

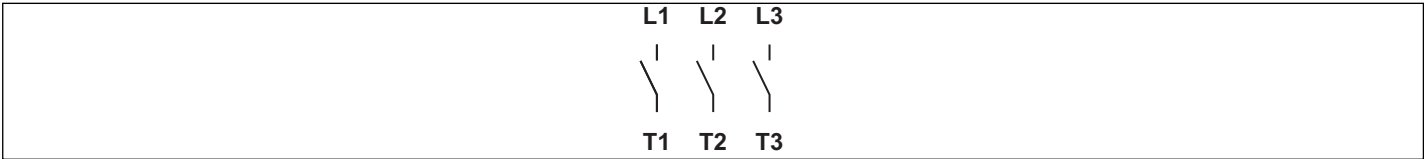

## Face plate

S1.F656/E10.V9

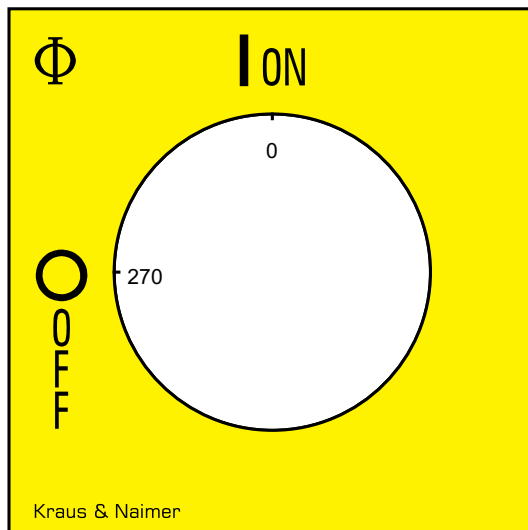

## HANDLES

**Designation:** S1B.G842

**Handle colour:** "2" red

### GENERAL TECHNICAL INFORMATION

#### Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x5,5

## AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C  
and KH(R)16 - KH(R)25B

**Designation:** K1.M510A/2CA-B

**Number of contacts:** "2" 2 auxiliary contacts

**Operation of contacts:** "C" 1 auxiliary contact  
closed in pos. 1 and 1 auxiliary contact closed in  
pos. 0 (NO/NC)

**Type of version:** "A" 1. auxiliary contact module

**Type of mounting:** "-B" for type of mounting VE,  
VE2, silver contacts


### IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Nominal Voltage			
		Voltage (V) AC / DC	
		690 AC	
Rated uninterrupted current I <sub>u</sub> /I <sub>th</sub>			
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements
16	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C
Rated operational current I <sub>e</sub>			
Utilization category	Voltage (V)		Current (A)
AC-15	110 - 240		6
AC-15	380 - 440		3
AC-15	500		1,50
AC-21A	20 - 690		16

### UL60947-4-1, UL508

Nominal Voltage			
		Voltage (V) AC / DC	
		600 AC	
Rated insulation voltage U <sub>i</sub>			
		Voltage (V) AC / DC	
		600 AC	
Rated thermal current			
		Current (A)	Ambient temperature (°C) Additional Text
		10	0 - 40 --
Pilot duty rating code			
Duty Code			
A600			
General Use			
AC / DC	Voltage (V)	Current (A)	No. of phases No. of poles No. of contacts in series
AC	600	10	1 1 1

### GENERAL TECHNICAL INFORMATION

GENERAL TECHNICAL INFORMATION				
Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm <sup>2</sup> ) or (AWG/kcmil)	Material of the wire
Solid wire	Min.	1	0.5mm <sup>2</sup>	Copper
Solid wire	Min.	2	0.5mm <sup>2</sup>	Copper
Flexible wire	Min.	1	0.75mm <sup>2</sup>	Copper
Flexible wire	Min.	2	0.75mm <sup>2</sup>	Copper
Flexible wire	Max.	2	2.5mm <sup>2</sup>	Copper
Flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2.5mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm <sup>2</sup>	Copper
Stripping length				
Length (mm) –				
				
Recommended screw driver				
Type of screw driver	Value			
Cross Screwdriver	PH1			
Slot screwdriver according to DIN 5264	0,8x4			
Tightening torque of screws				
tightening torque (Nm)			tightening torque (lb-in)	
0.60			5	

## General Information

### Text

- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.

13	21
I	L
14	22