


Connection Clamp

acc. to DIN EN 60998 with mounting holes

116.G

EAN Code: 4011126003147

the photorealistic images are to be considered as reference images

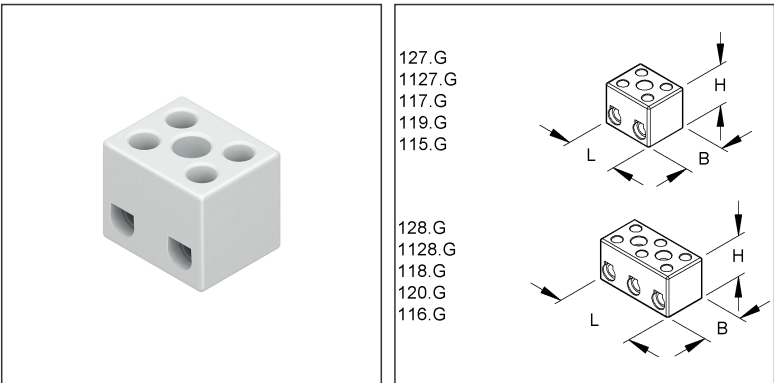

Article Description

Connection clamp, clamping range, 2,5-16,0 mm², 3 poles, electrotechnical porcelain, colour white, with mounting holes

Additional Price Information

Article group	K308
---------------	------

Weight

Weight per quantity unit	61 g
Weight in kg per 100	6,01 kg

Physical Article Dimensions

Height	23.50 mm
Width	23.50 mm
Depth/length	45.50 mm

Technical Datasheet

Clamps

116.G

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	46.00 mm	Width	24.00 mm	Height	24.00 mm
Gross weight	0,06 kg	Volume	0,000 m³		
Min. quantity	1	Max. Quantity	1		
25 pieces = 1		✓ VP2-preferred PU			
Gross weight	1,5 kg				
Min. Quantity	25.00	Max. Quantity	25.00		
250 pieces = 1 covering box					
Gross weight	15 kg				
Min. Quantity	250.00	Max. Quantity	250.00		

Tender Text

Connection terminal according to DIN EN 60998, with fixing holes, halogen-free.
The terminal must be fixed in position.
Dimensions (approx. Dimensions) H x W x L : 23.5 x 23.5 x 45.5 mm
Clamping range solid, rigid, flexible : 2.5 – 16.0 mm²
Connection options solid : 2 x 2.5 mm², 4 x 4.0 mm², 3 x 6.0 mm², 1 x 10.0 mm², 1 x 16.0 mm²
Connection options rigid, flexible : 1 x 2,5 mm², 1 x 4,0 mm², 2 x 6,0 mm², 1 x 10,0 mm², 1 x 16,0 mm²
Poles : 3
Material insulating part : porcelain, glazed
Material clamping bolts : brass
Material clamping bolts : galvanised steel
Max. Ambient temperature : 200°C
Nominal voltage : 450 V
Colour : white
Kleinhuis Model-No. : 116.G
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	85369010