

Batibox™ flush-mounting boxes for dry partitions (continued)



893 46



892 43 example of use

Pack Cat.Nos Boxes with cover for luminaires

30	893 36	For ceiling rose unit Ø67 mm - depth 50 mm Supplied with hook Equipped with 4 inputs Ø16-20
50	893 46	For striplight Ø40 mm - depth 40 mm



10 892 43 Fixing accessories for ceiling rose units

Anchoring device
Quick installation by self-locking system
Supplied with 2 m long steel cable
Used to secure a ceiling rose unit by anchoring on the framework of the structure (up to 25 kg)
Automatic tightening of the cable without any tool
APAVE certified resistance



10 892 86 Threaded rod, length 160 mm for anchoring on the frame
Supplied with M6 nut




Junction boxes

Supplied with cover and screws
Knockout base


		Box ext. dim. (mm)	Cover dim. (mm)
20	893 70	Ø67 x 40 mm	Ø80 mm
10	893 71	Ø85 x 40 mm	100 x 100 mm
10	893 72	115 x 115 x 40 mm	140 x 140 mm
10	893 73	160 x 105 x 40 mm	190 x 135 mm
10	893 74	170 x 170 x 50 mm	195 x 195 mm
10	893 75	230 x 170 x 50 mm	225 x 210 mm

Batibox™ flush-mounting boxes for dry partitions


■ Installation

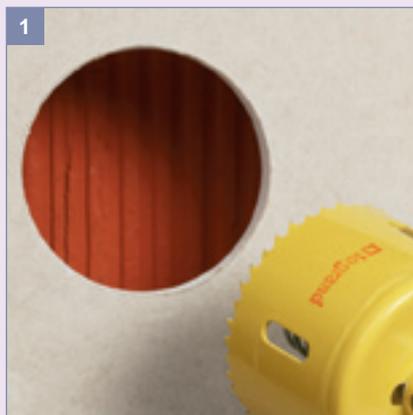

1
Hole cutter saw Ø67
Box Ø67 mm, more space for cabling

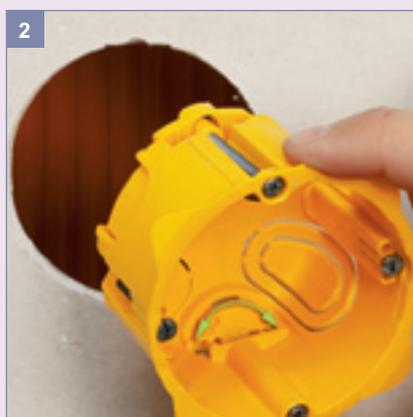

2
Retractable fixing claws for a better comfort during installation

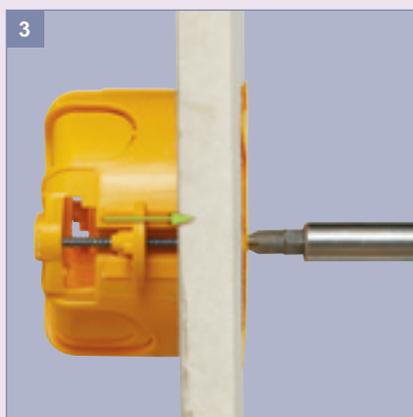

3
Fixing claws adapted to the thickness of the wall
Automatic positioning, even with an electric screwdriver



4
Large space to improve fixing (according to the drilling Ø67 to 68 mm)