

# PRODUCT DATASHEET

## DR-PFM -150/220-240/24/P

**LED DRIVER OUTDOOR PERFORMANCE | Constant voltage outdoor LED driver**



### AREAS OF APPLICATION

- Suitable for indoor and outdoor installations
- Facade and building illumination
- Ideal for illuminating public spaces
- Bathrooms, kitchens and outdoor areas
- Offices, shopping centers, hospitals, restaurants, hotels

### PRODUCT BENEFITS

- Perfectly matched to 24 V LED flexible strips
- 5 years guarantee
- Very stable output power
- Quick and simple installation due to prewiring
- High efficiency and reliability
- Installation in very cold and hot environments

### PRODUCT FEATURES

- Available in 30 W, 60 W, 100 W, 150 W and 250 W
- Lifetime: up to 50,000 h (at max. tc temperature)
- Type of protection: IP66
- Operating temperature range at ta: -40...50 °C
- Supply voltage: 220...240 V
- Operating frequency: 50/60 Hz
- Surge protection: up to 4 kV (L-N) for 30W/60W, 6 kV (L-N) / 6 kV (L/N-PE) for 100W/150W/250W
- Short-circuit and overload protection

## TECHNICAL DATA

### Electrical data

Nominal output power	150 W <sup>1)</sup>
Input voltage AC	198...264 V <sup>2)</sup>
Mains frequency	50/60 Hz
Nominal output voltage	24 V <sup>3)</sup>
Nominal voltage	220...240 V
Device power loss	20 W <sup>4)</sup>
Power factor $\lambda$	0.95 <sup>5)</sup>
ECG efficiency	88 % <sup>6)</sup>
Inrush current	45 A <sup>7)</sup>
Max. ECG no. on circuit breaker 10 A (B)	10
Max. ECG no. on circuit breaker 16 A (B)	16
Max. ECG no. on circuit breaker 25 A (B)	25
Galvanic isolation primary/secondary	3.75 kV
Surge capability (L/N-Ground)	6 kV
Surge capability (L-N)	6 kV
Nominal output current	6250 mA <sup>8)</sup>
U-OUT (working voltage)	24 V

<sup>1)</sup> From 0 to 150 W

<sup>2)</sup> Permitted voltage range

<sup>3)</sup> Maximum 24 V

<sup>4)</sup> At maximum LED load of 150 W


<sup>5)</sup> Full load at 230 V

<sup>6)</sup> At full load and 230 V

<sup>7)</sup>  $t_{\text{width}} = 15.3 \mu\text{s}$  (measured at 50 %  $I_{\text{peak}}$ )

<sup>8)</sup>  $\pm 10\%$

### Dimensions & weight

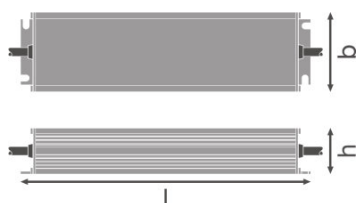

Length	219.0 mm
Width	63.0 mm

Height	38.0 mm
Product weight	970.00 g
Cable cross-section, input side	1.0 mm <sup>2</sup>
Mounting hole spacing, width	34.0 mm
Cable cross-section, output side	1.5 mm <sup>2</sup>
Mounting hole spacing, length	210.0 mm
Prewired	Yes

### Colors & materials

Body material	Metal
---------------	-------

### Temperatures & operating conditions

Ambient temperature range	-40...+50 °C
Permitted rel. humidity during operation	20...95 % <sup>1)</sup>
Maximum temperature at tc test point	90 °C
Max.housing temperature in case of fault	110 °C

<sup>1)</sup> Maximum 56 days/year at 95%

### Lifespan

ECG lifetime	50000 h <sup>1)</sup>
--------------	-----------------------

<sup>1)</sup> At maximum T<sub>c</sub> = 90°C / 10% failure rate

### Additional product data

Encapsulated	Yes
--------------	-----

### Capabilities

Dimmable	No
Suitable for fixtures with prot. class	I
Overheating protection	Yes
Overload protection	No
Short-circuit protection	Yes
Suitable for no-load mode operation	Yes
Max. cable length to lamp/LED module	10 m

### Certificates & standards

Type of protection	IP66
Standards	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384
Approval marks – approval	CE / TUV

### Logistical data

Temperature range at storage	-40...+80 °C
------------------------------	--------------

## DOWNLOAD DATA

### File



User instruction  
LED DRIVER OUTDOOR PFM

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075239982	Shipping carton box 10	258 mm x 187 mm x 263 mm	10395.00 g	12.69 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.