

## MasterCross-Laser 2G





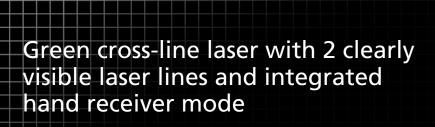



- Green laser technology
- Extremely bright green laser cross at front in the DLD design achieves high-quality lines as well as a clean and clear and therefore easily visible line image.
- With the magnetic clamp and wall bracket the device can be used as a standalone unit, in a combination as well as in horizontal and vertical position.
- Ideal for mounting horizontally and vertically on drywall construction profiles.
- Automatic Level: automatic alignment by virtue of a magnetic pendulum system.
- Tilt mode is an additional feature that permits gradients to be laid out.
- Individually switchable laser lines
- Out-Of-Level: is indicated by optical signals when the unit is outside its self-levelling range.
- **GRX-Ready:** in combination with the optional laser receiver, the integrated hand-held receiver mode permits detection of laser lines at long distances and under unfavourable light conditions.
- Transport lock: A pendelum lock protects unit during transport.

## **TECHNICAL DATA**

ACCURACY 2 mm per 10 m

SELF-LEVELLING RANGE ± 3°

**OPERATING RANGE** 

(depending on room illumination) 25 m

**LEVELLING** automatic

LASER WAVELENGTH 510 nm

LASER

line lasers, class 2 < 1 mW

POWER SUPPLY

4 x 1,5V type AA, approx. 4 hrs operating time

**WORKING TEMPERATURE** 

0°C ... +50°C

STORAGE TEMPERATURE

WEIGHT MCL 2G incl. batteries 570 g (without wall bracket)

**DIMENSIONS** MCL 2G 66 x 100 x 125 mm (W x H x D)

## 1H 1V







ARTICLE	ARTICLE NO	EAN-CODE	PU
MasterCross-Laser 2G	031.370A	4 021563 695386	1


























including carrying case

+ clamp and wall bracket

+ batteries

Packing dimension (W x H x D) 340 x 275 x 123 mm