



Figure similar

MLFB-Ordering data

6SL3210-1PE14-3AL1

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications																																								
Input <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Line voltage</td><td>380 ... 480 V ± 10 %</td></tr> <tr> <td>Line frequency</td><td>47 ... 63 Hz</td></tr> <tr> <td>Rated current (LO)</td><td>5.50 A</td></tr> <tr> <td>Rated current (HO)</td><td>4.70 A</td></tr> </table>	Number of phases	3 AC	Line voltage	380 ... 480 V ± 10 %	Line frequency	47 ... 63 Hz	Rated current (LO)	5.50 A	Rated current (HO)	4.70 A	<table> <tr> <td>Power factor λ</td><td>0.85</td></tr> <tr> <td>Offset factor $\cos \varphi$</td><td>0.95</td></tr> <tr> <td>Efficiency η</td><td>0.96</td></tr> <tr> <td>Sound pressure level (1m)</td><td>72 dB</td></tr> <tr> <td>Power loss</td><td>0.07 kW</td></tr> </table>	Power factor λ	0.85	Offset factor $\cos \varphi$	0.95	Efficiency η	0.96	Sound pressure level (1m)	72 dB	Power loss	0.07 kW																				
Number of phases	3 AC																																								
Line voltage	380 ... 480 V ± 10 %																																								
Line frequency	47 ... 63 Hz																																								
Rated current (LO)	5.50 A																																								
Rated current (HO)	4.70 A																																								
Power factor λ	0.85																																								
Offset factor $\cos \varphi$	0.95																																								
Efficiency η	0.96																																								
Sound pressure level (1m)	72 dB																																								
Power loss	0.07 kW																																								
Output <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Rated voltage</td><td>400 V</td></tr> <tr> <td>Rated current (LO)</td><td>4.10 A</td></tr> <tr> <td>Rated current (HO)</td><td>3.10 A</td></tr> <tr> <td>Max. output current</td><td>6.20 A</td></tr> <tr> <td>Rated power IEC 400V (LO)</td><td>1.50 kW</td></tr> <tr> <td>Rated power NEC 480V (LO)</td><td>2.00 hp</td></tr> <tr> <td>Rated power IEC 400V (HO)</td><td>1.10 kW</td></tr> <tr> <td>Rated power NEC 480V (HO)</td><td>1.50 hp</td></tr> <tr> <td>Pulse frequency</td><td>4 kHz</td></tr> <tr> <td>Output frequency for vector control</td><td>0 ... 200 Hz</td></tr> <tr> <td>Output frequency for V/f control</td><td>0 ... 550 Hz</td></tr> </table>	Number of phases	3 AC	Rated voltage	400 V	Rated current (LO)	4.10 A	Rated current (HO)	3.10 A	Max. output current	6.20 A	Rated power IEC 400V (LO)	1.50 kW	Rated power NEC 480V (LO)	2.00 hp	Rated power IEC 400V (HO)	1.10 kW	Rated power NEC 480V (HO)	1.50 hp	Pulse frequency	4 kHz	Output frequency for vector control	0 ... 200 Hz	Output frequency for V/f control	0 ... 550 Hz	Ambient conditions <table> <tr> <td>Cooling</td><td>Internal air cooling</td></tr> <tr> <td>Cooling air requirement</td><td>0.005 m³/s (0.177 ft³/s)</td></tr> <tr> <td>Installation altitude</td><td>1000 m (3280.84 ft)</td></tr> </table> Ambient temperature <table> <tr> <td>Operation LO</td><td>-5 ... 40 °C (23 ... 104 °F)</td></tr> <tr> <td>Operation HO</td><td>-5 ... 50 °C (23 ... 122 °F)</td></tr> <tr> <td>Transport</td><td>-25 ... 55 °C (-13 ... 131 °F)</td></tr> <tr> <td>Storage</td><td>-25 ... 55 °C (-13 ... 131 °F)</td></tr> </table> Relative humidity <table> <tr> <td>Max. operation</td><td>95 % RH, condensation not permitted</td></tr> </table>	Cooling	Internal air cooling	Cooling air requirement	0.005 m ³ /s (0.177 ft ³ /s)	Installation altitude	1000 m (3280.84 ft)	Operation LO	-5 ... 40 °C (23 ... 104 °F)	Operation HO	-5 ... 50 °C (23 ... 122 °F)	Transport	-25 ... 55 °C (-13 ... 131 °F)	Storage	-25 ... 55 °C (-13 ... 131 °F)	Max. operation	95 % RH, condensation not permitted
Number of phases	3 AC																																								
Rated voltage	400 V																																								
Rated current (LO)	4.10 A																																								
Rated current (HO)	3.10 A																																								
Max. output current	6.20 A																																								
Rated power IEC 400V (LO)	1.50 kW																																								
Rated power NEC 480V (LO)	2.00 hp																																								
Rated power IEC 400V (HO)	1.10 kW																																								
Rated power NEC 480V (HO)	1.50 hp																																								
Pulse frequency	4 kHz																																								
Output frequency for vector control	0 ... 200 Hz																																								
Output frequency for V/f control	0 ... 550 Hz																																								
Cooling	Internal air cooling																																								
Cooling air requirement	0.005 m ³ /s (0.177 ft ³ /s)																																								
Installation altitude	1000 m (3280.84 ft)																																								
Operation LO	-5 ... 40 °C (23 ... 104 °F)																																								
Operation HO	-5 ... 50 °C (23 ... 122 °F)																																								
Transport	-25 ... 55 °C (-13 ... 131 °F)																																								
Storage	-25 ... 55 °C (-13 ... 131 °F)																																								
Max. operation	95 % RH, condensation not permitted																																								

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

SIEMENS

Data sheet for SINAMICS Power Module PM240-2

MLFB-Ordering data

6SL3210-1PE14-3AL1

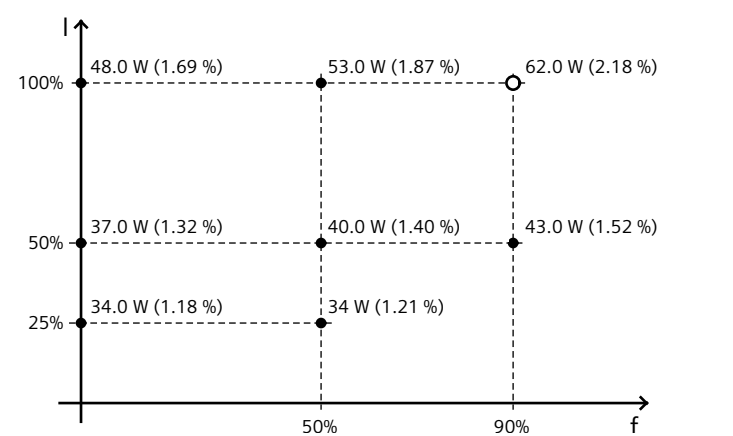


Figure similar

Mechanical data	Connections
Degree of protection	IP20 / UL open type
Size	FSA
Net weight	1.50 kg (3.31 lb)
Width	73 mm (2.87 in)
Height	196 mm (7.72 in)
Depth	165 mm (6.50 in)
Line side	
Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)
Motor end	
Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)

Converter losses to EN 50598-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-73.45 %



The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	100 m (328.08 ft)

Standards

Compliance with standards	UL, cUL, CE, C-Tick (RCM), SEMI F47
---------------------------	-------------------------------------

CE marking	Low-voltage directive 2006/95/EC
------------	----------------------------------