

Spring plungers with hexagon socket and thrust pin, light spring force, LONG-LOK secured

Item description/product images



Description

Material:

Sleeve steel grade 5.8.

Thrust pin steel.

Spring grade D steel wire.

LONG-LOK thread lock nylon.

Version:

Black oxidised.


Thrust pin hardened.

Drawing reference:

L2 = ca. two full threads

1) grub screw glued-in

Drawings

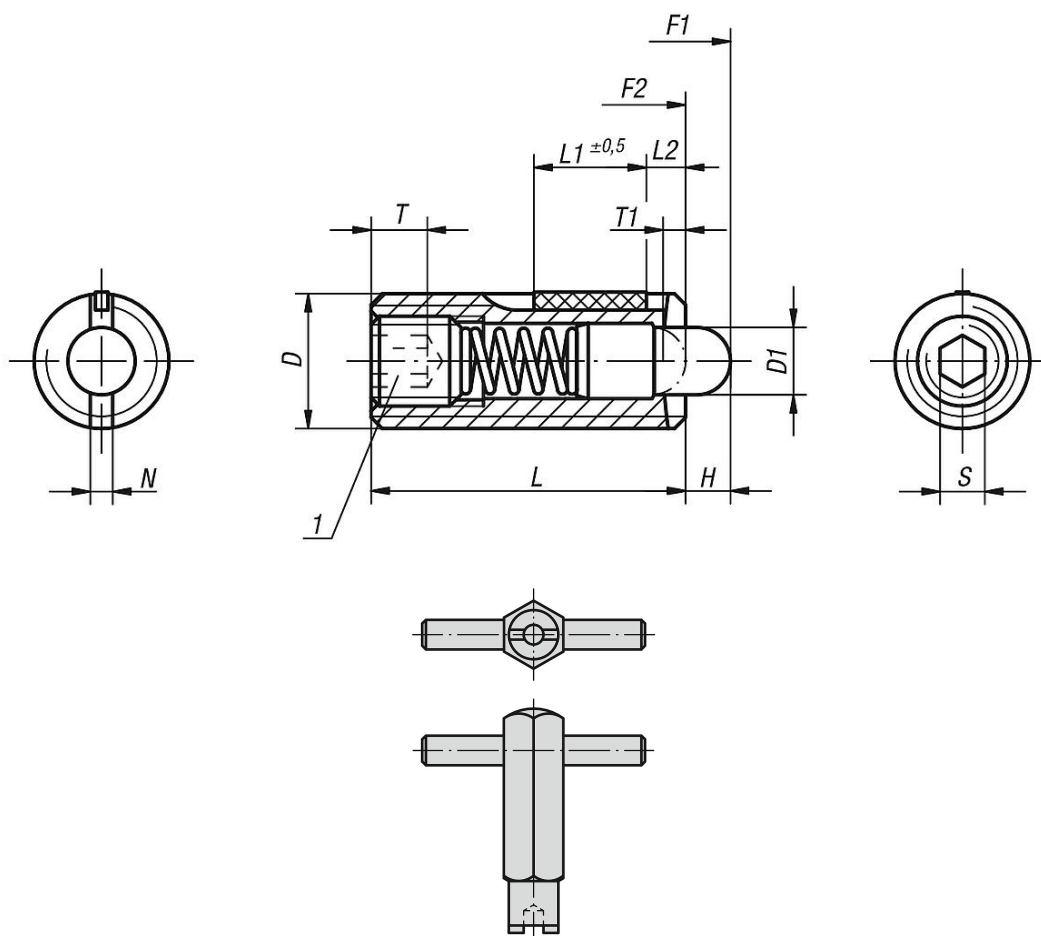

Overview of items

Spring plungers with hexagon socket and thrust pin, light spring force, LONG-LOK secured

Spring plungers with hexagon socket and thrust pin, light spring force, LONG-LOK secured

Overview of items

Order No.	D	D1	H	L	L1	T	T1	N	S	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N	Tightening torque approx. Nm	Loosening torque approx. Nm	Order No. assembly key
K0327.105	M5	2,4	2,3	18	7	2	0,8	0,8	1,5	3	10	0,12	0,08	K0317.905
K0327.106	M6	2,7	2,5	20	7	2,5	1	1	2	3	9	0,45	0,22	K0317.906
K0327.108	M8	3,5	3	22	8	3	1,4	1,2	2,5	4	16	1,05	0,37	K0317.908
K0327.110	M10	4	3	22	9	3,5	1,4	1,6	3	4	16	1,3	0,6	K0317.910
K0327.112	M12	6	4	28	10	5	2	2	4	5	27	2	1,3	K0317.912
K0327.116	M16	7,5	5	32	14	6	2,5	2,5	5	20	45	3,9	3	K0317.916