



SOLID-STATE TIME-DELAY RELAY MULTI-FUNCTION,
8 FUNCTIONS 1 CHANGEOVER CONTACT AC/DC 24V,
AC 200 TO 240V 0.05 S TO 100H WIDTH 45MM SCREW
TERMINALS

General technical details:		
Product brand name		SIRIUS
product designation		timing relay
Protection class IP / on the front		IP40
Protection class IP / of the terminal		IP20
Built in orientation		any
Supply voltage frequency		
• 1 / for auxiliary and control current circuit		
• initial rated value	Hz	50
• final rated value	Hz	60
Product function		
• star-delta circuit		No
• with auxiliary voltage / pulse-shaping		Yes
• at the relay outputs / changeover delayed/without delay		No
Product component / semi-conductor output		No
Product extension / optional / remote control		No
Product extension / strictly required / remote control		No
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during storage	°C	-40 ... 85

• during operating	°C	-25 ... 60
• during transport	°C	-40 ... 85
Relative humidity		
• during operating phase	%	15 ... 70
Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5		2 kV
Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV
Electrostatic discharge / according to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling / according to IEC 61000-4-3		10 V/m
Resistance against vibration		10 ... 55 Hz / 0.35 mm
Impulse voltage resistance / rated value	V	4,000
Insulation voltage / rated value	V	300
Active power loss / total / typical	W	2
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K
Item designation / according to DIN EN 61346-2		K
Category / according to EN 954-1		none
Protection against electrical shock		finger-safe

Switching Function:

Switching function

• slow-operating	Yes
• making pulse contact	No
• firmly clocked beginning with pulse	No
• firmly clocked beginning with pause	Yes
• relapse delayed	Yes
• variably clocked start with impulse	No
• impuls variably clocked start with pause	No
• with auxiliary voltage	
• in an additive way slow-operating	Yes
• temporary line fault	Yes
• relapse delayed	Yes
• without auxiliary voltage / relapse delayed	No
• slow-operating/instantaneous contact	No
• with auxiliary voltage	
• relapse delayed/instantaneous contact	No
• slow-operating/relapse delayed/instantaneous contact	No
• firmly clocked beginning with pause/instantaneous contact	No

- making pulse contact/instantaneous contact
- with auxiliary voltage
 - temporary line fault/instantaneous contact
 - pulse modelling/instantaneous contact
 - slow-operating/instantaneous contact

No

No

No

No

General details:

Type of voltage / of the controlled supply voltage

AC/DC

Control supply voltage frequency

- 1

Hz

50 ... 60

Control supply voltage

- 1
 - at 50 Hz / for AC / rated value
 - at 60 Hz / for AC / rated value
 - for DC / rated value
- 2
 - at 50 Hz
 - for AC
 - at 60 Hz
 - for AC

V

24

V

24

V

24

V

200 ... 240

V

200 ... 240

Working range factor supply voltage rated value

- at 50 Hz
 - for AC
- at 60 Hz
 - for AC
- for DC

0.85 ... 1.1

0.85 ... 1.1

0.85 ... 1.1

Auxiliary circuit:

Operating current / of auxiliary contacts

- as normally closed contact / for AC-15
 - at 24 V
 - at 250 V
- as normally open contact / for AC-15
 - at 24 V
 - at 250 V
- at AC-15
 - maximum
- at DC-13
 - at 24 V
 - at 125 V
 - at 250 V

A

3

A

3

A

3

A

3

A

3

A

1

A

0.2

A

0.1

Number of NC contacts / delayed switching		0
Number of NC contacts / non-delayed		0
Number of NO contacts / delayed switching		0
Number of NO contacts / non-delayed		0
Number of change-over switches / delayed switching		1
Number of change-over switches / non-delayed		0

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 4 A
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail

Installation/mounting/dimensions:

Width	mm	45
Height	mm	57
Depth	mm	73
Distance, to be maintained, to the ranks assembly		
• upwards	mm	0
• forwards	mm	0
• sideways	mm	0
• backwards	mm	0
• downwards	mm	0
Distance, to be maintained, to earthed part		
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
• forwards	mm	0
• downwards	mm	0
Distance, to be maintained, conductive elements		
• downwards	mm	0
• backwards	mm	0
• sideways	mm	0
• forwards	mm	0
• upwards	mm	0

Connections:

Design of the snap-on socket base		none
Design of the electrical connection		
• jumper socket		No
• for auxiliary and control current circuit		screw-type terminals

Type of the connectable conductor cross-section / for AWG conductors / for auxiliary contacts	2x (20 ... 16)
AWG number / as coded connectable conductor cross-section / for auxiliary contact	
• minimum	20
• maximum	16

Certificates/approvals:

Verification of suitability

CE / UL / CSA

General Product Approval

Test Certificates



CQC

[ROSTEST](#)



UL

[Manufacturer](#)

Shipping Approval



DNV



GL



LRS



PRS



RINA

Shipping Approval

other



RMRS

[Manufacturer](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RP2005-1AP30/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RP2005-1AP30

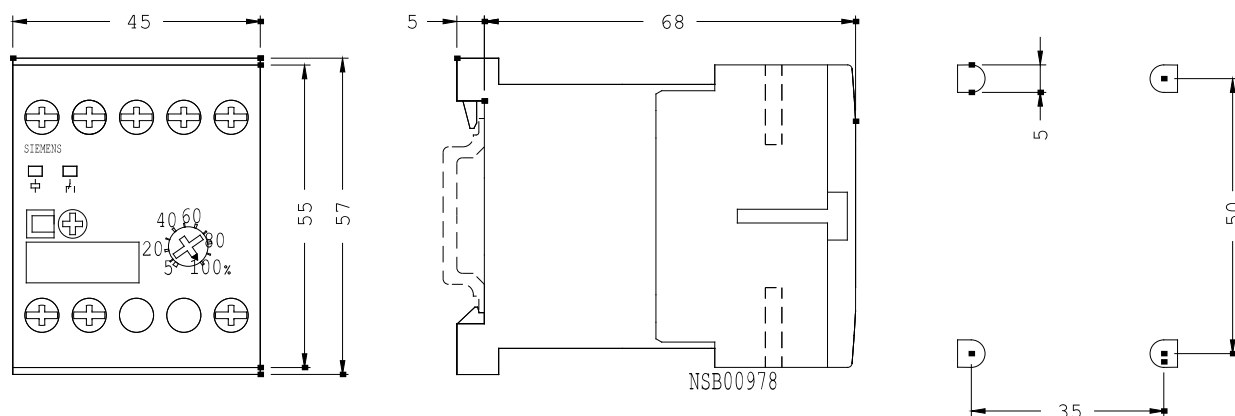

last change:

Oct 31, 2011