

PLUG-IN COMMUNICATIONS MODULE PAC RS485



Similar to image

General technical details:		
Product designation		expansion module PAC RS485
Mounting type		plug-in module for the module slot of the PAC3200 / 4200
Type of voltage supply		from PAC 3200 / 4200
Combustibility class acc. to UL 94		V 0
Mean time between failures (MTBF)	a	222.3
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		P
• according to DIN EN 61346-2		P
Communication:		
Design of the electrical connection		screw-type terminals
protocol / is supported		SEAbus / MODBUS (switchable)
Potential separation		Maximum insulation voltage: 500V AC
Dimensions and weights:		
Width	mm	43
Height	mm	63
Depth	mm	22

## Degree of protection

Protection class IP

IP20

## Ambient conditions:

Ambient temperature

- during operating

°C

-5 ... +55

Degree of pollution

2 according to IEC 61131

Transfer rate / min.

kbit/s

4.8

Transfer rate / maximum

kbit/s

38.4

## Certificates/approvals:

General Product Approval

EMC

Declaration of  
Conformity

other



[Confirmation](#)

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM9300-0AM00-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/7KM9300-0AM00-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=7KM9300-0AM00-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AM00-0AA0)

CAX-Online-Generator

<http://www.siemens.com/cax>

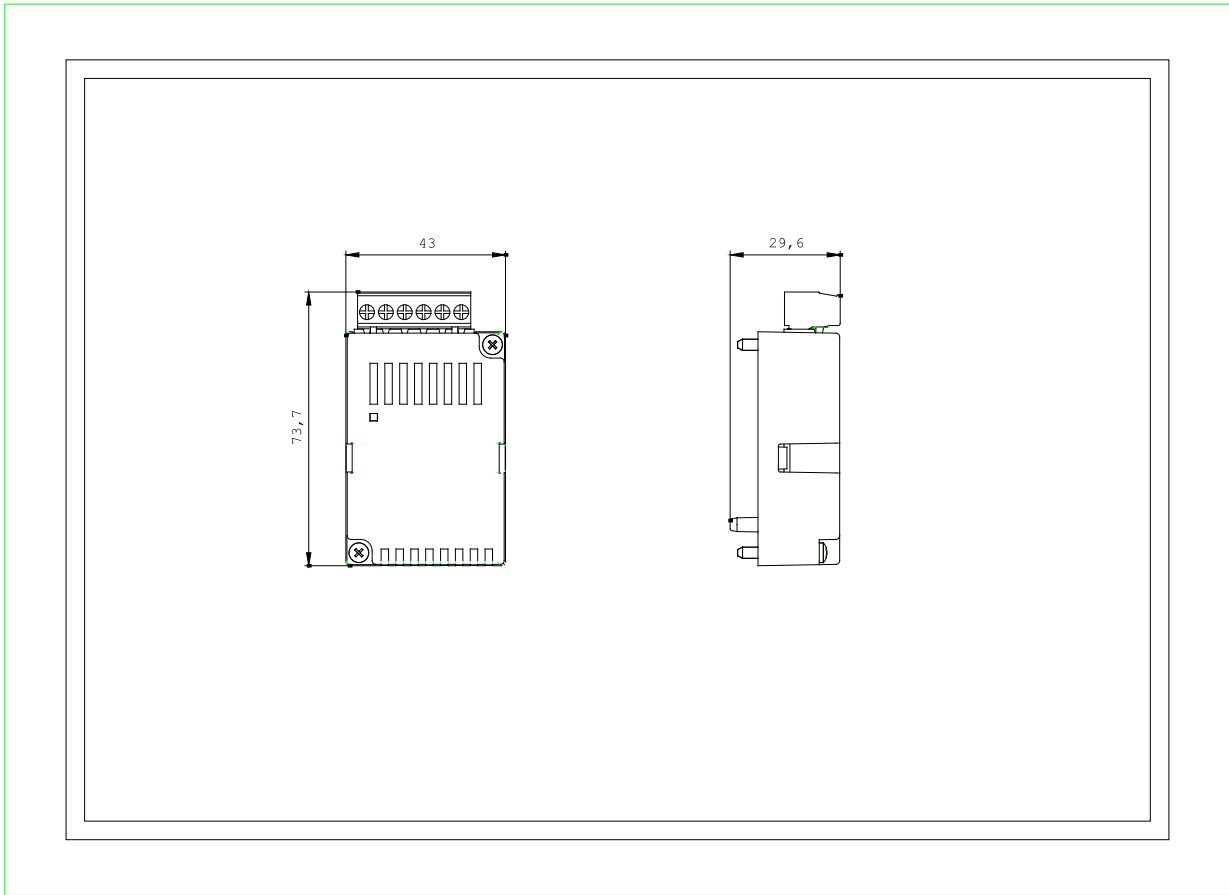

-P

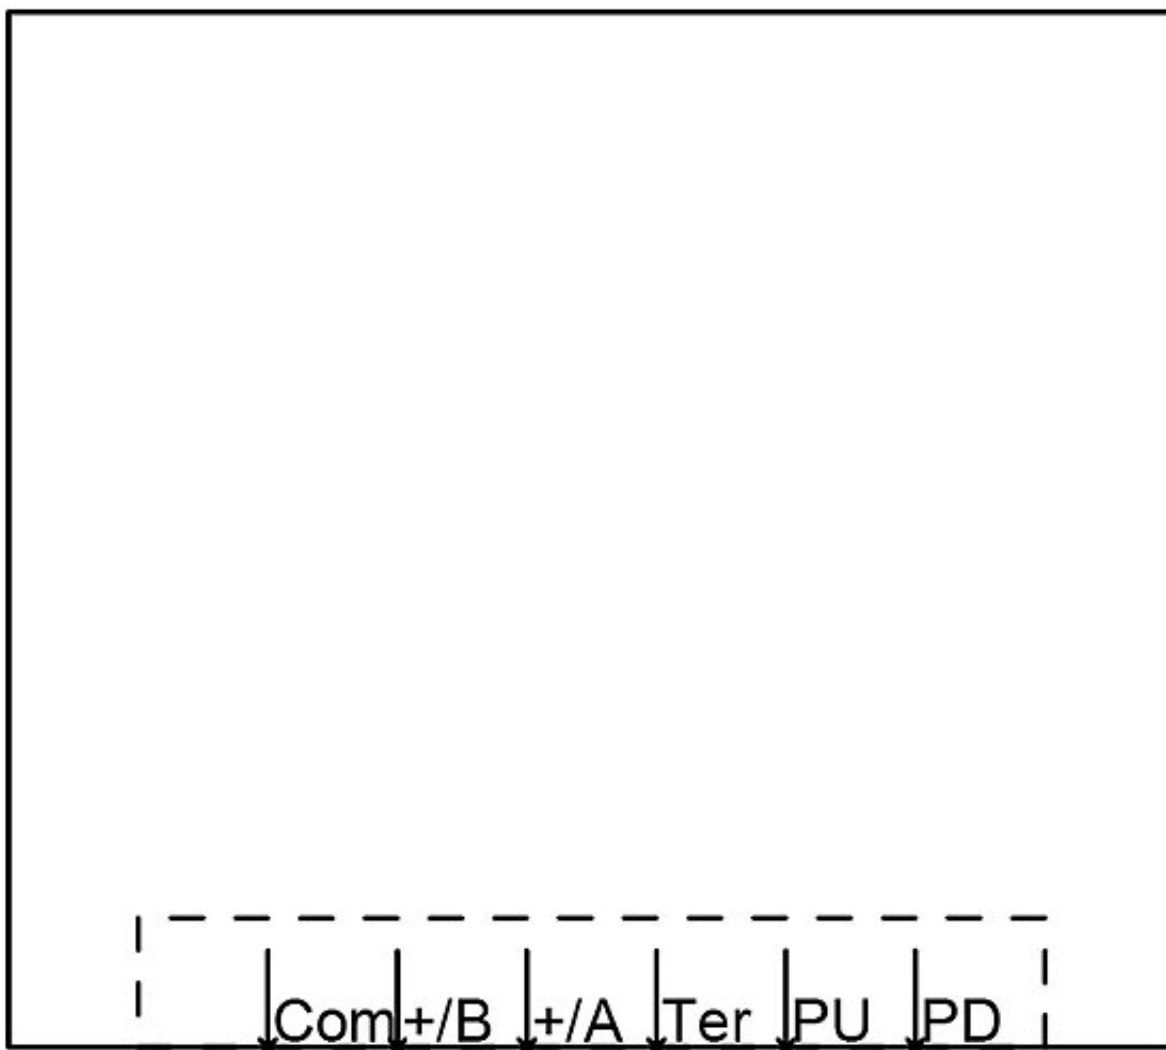

last change:

Mar 17, 2014