



LOAD FEEDER FUSELESS DIRECT START,  
AC 400V, SZ S00 0.22. . . 0.32A,  
AC 230V SCREW CONNECTION FOR RAIL-MOUNTING,  
TYPE OF COORDINATION 2,  
IQ = 150KA (ALSO FULFILLS TYPE OF COORDINATION 1)  
1NO (CONTACTOR)

### General technical data:

Product brand name		SIRIUS
product designation		non-fused load feeders 3RA2
Design of the product		direct starter
Size of the load feeder		S00
Protection class IP / on the front		IP20
Degree of pollution		3
Insulation voltage / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature <ul style="list-style-type: none"> <li>during transport</li> <li>during storage</li> <li>during operating</li> </ul>	°C	-55 ... 80
	°C	-55 ... 80
	°C	-20 ... 60
Impulse voltage resistance / rated value	kV	6
Active power loss / per conductor / typical	W	2
Item designation <ul style="list-style-type: none"> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> <li>according to DIN EN 61346-2</li> </ul>		Q
		Q
Type of assignment		2

<b>Mechanical operating cycles as operating time / of the contactor</b> • typical		10,000,000
<b>Manufacturer article number</b> • of the circuit-breakers included in the scope of supply • of the contactor included in the scope of supply • of the link module included in the scope of supply		<a href="#">3RV2011-0DA10</a> <a href="#">3RT2015-1AP01</a> <a href="#">3RA1921-1DA00</a>
<b>Design of the switching contact</b>		mechanical
<b>Type of the motor protection</b>		bimetal
<b>Adjustable response current</b> • of the current-dependent overload release	A	0.22 ... 0.32

<b>Communication:</b>		
<b>Product function / bus-communication</b>		No
<b>Protocol / will be supported</b> • AS interface protocol • PROFIBUS DP protocol • PROFINET protocol		No No No
<b>Product extension / function module for communication</b>		No

<b>Main circuit:</b>		
<b>Number of poles / for main current circuit</b>		3
<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating voltage / at AC-3 / rated value / maximum</b>	V	690
<b>Operating current</b> • at AC-1 / at 400 V / rated value • at AC-2 / at 400 V / rated value • at AC-3 / at 400 V / rated value • at AC-4 / at 400 V / rated value	A A A A	0.32 0.3 0.3 0.3
<b>Service power</b> • at AC-2 / at 400 V / rated value • at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value • at AC-4 / at 400 V / rated value	W  W W W W	90  90 120 120 90
<b>Off-load operating frequency</b>	1/h	10,000
<b>Frequency of operation</b> • at AC-1 / according to IEC 60947-6-2 / maximum • at AC-2 / according to IEC 60947-6-2 / maximum	1/h 1/h	1,000 750

- at AC-3 / according to IEC 60947-6-2 / maximum
- at AC-4 / according to IEC 60947-6-2 / maximum

1/h	750
1/h	250

#### Control circuit:

Type of voltage / of the controlled supply voltage		AC
Control supply voltage frequency		
• 1 / rated value	Hz	50
Control supply voltage / 1		
• at 50 Hz / for AC / rated value	V	230
• at 60 Hz / for AC / rated value	V	230
Apparent holding power / of the solenoid / for AC	V·A	4.2
Inductive power factor / with the pull-in power of the coil		0.25

#### Auxiliary circuit:

Product extension / auxiliary switch		Yes
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		1
Number of change-over switches / for auxiliary contacts		0

#### Inputs/ Outputs:

Number of digital inputs		0
--------------------------	--	---

#### Short-circuit:

Product function / short circuit protection		Yes
Design of the short-circuit protection		circuit-breakers
Breaking capacity limit short-circuit current (Icu)		
• at 400 V / rated value	A	100,000
• at 500 V / rated value	A	100,000
• at 690 V / rated value	A	100,000

#### Installation/mounting/dimensions:

Built in orientation		vertical
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	45
Height	mm	167.2
Depth	mm	97.1
Distance, to be maintained, to the ranks assembly		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	20
• downwards	mm	30

• sideways	mm	0
<b>Distance, to be maintained, to earthed part</b>		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	20
• downwards	mm	10
• sideways	mm	9
<b>Distance, to be maintained, conductive elements</b>		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	20
• downwards	mm	10
• sideways	mm	9

### Connections:

<b>Design of the electrical connection</b>		
• for main current circuit		screw-type terminals
• for auxiliary and control current circuit		screw-type terminals
<b>Type of the connectable conductor cross-section</b>		
• for main contacts		
• solid		2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>
• stranded		2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>
• finely stranded		
• with conductor end processing		2x (0.75 ... 2.5 mm <sup>2</sup> )
• for AWG conductors / for main contacts		2x (18 ... 14), 2x 12
• for auxiliary contacts		
• solid		2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>
• finely stranded		
• with conductor end processing		2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
• for AWG conductors / for auxiliary contacts		2x (20 ... 16), 2x (18 ... 14), 2x 12

### Certificates/approvals:

<b>Verification of suitability</b>		CE / UL / CSA / CCC
<b>Varification of suitability / ATEX</b>		No

<b>General Product Approval</b>	<b>For use in hazardous locations</b>	<b>Test Certificates</b>
---------------------------------	---------------------------------------	--------------------------

[ROSTEST](#)



[DEKRA EXAM, DMT](#)

[Manufacturer](#)

#### Shipping Approval

**other**



ABS



PRS



RINA

[Manufacturer](#)

[other](#)

#### UL/CSA ratings

##### Operating current (FLA) / for three-phase squirrel cage motors

- at 480 V / rated value
- at 600 V / rated value

A

0.32

A

0.32

##### Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

#### Safety:

##### B10 value / with high demand rate

- according to SN 31920

1,000,000

##### Failure rate (FIT value) / with low demand rate

- according to SN 31920

FIT

150

##### Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

40

%

75

##### T1 value / for proof test interval or service life

- according to IEC 61508

a

10

##### Protection against electrical shock

finger-safe

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator



<http://www.siemens.com/cax>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2110-0DA15-1AP0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA2110-0DA15-1AP0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2110-0DA15-1AP0)

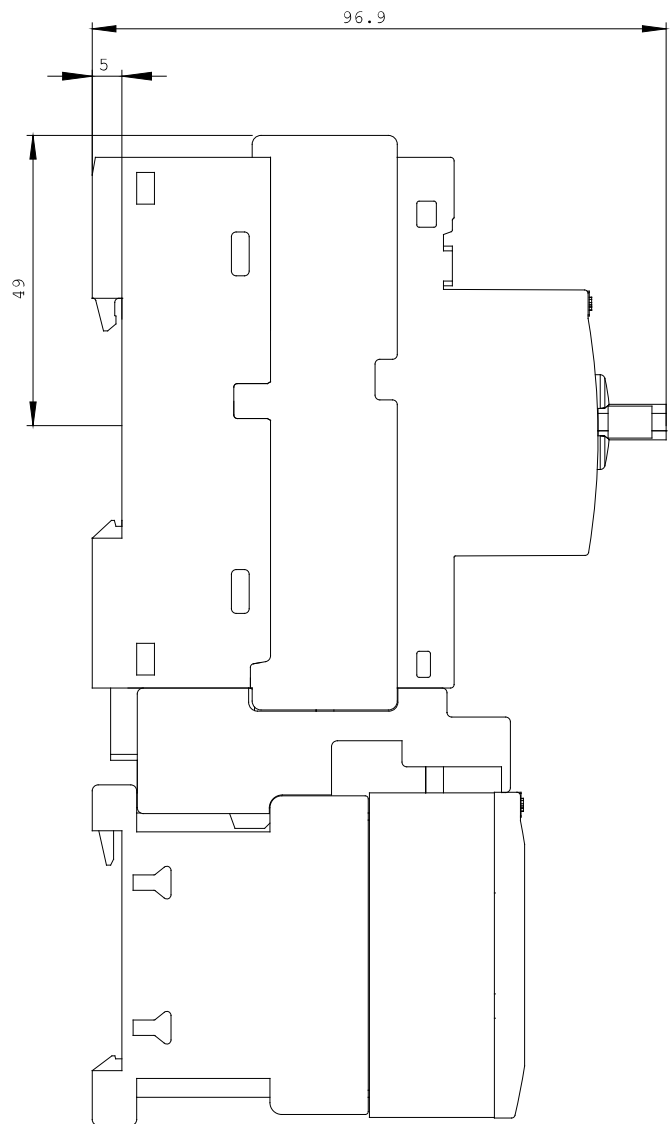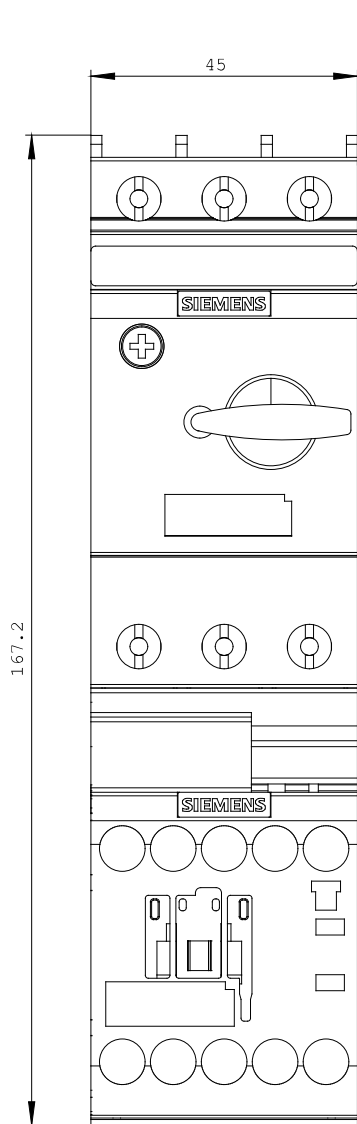

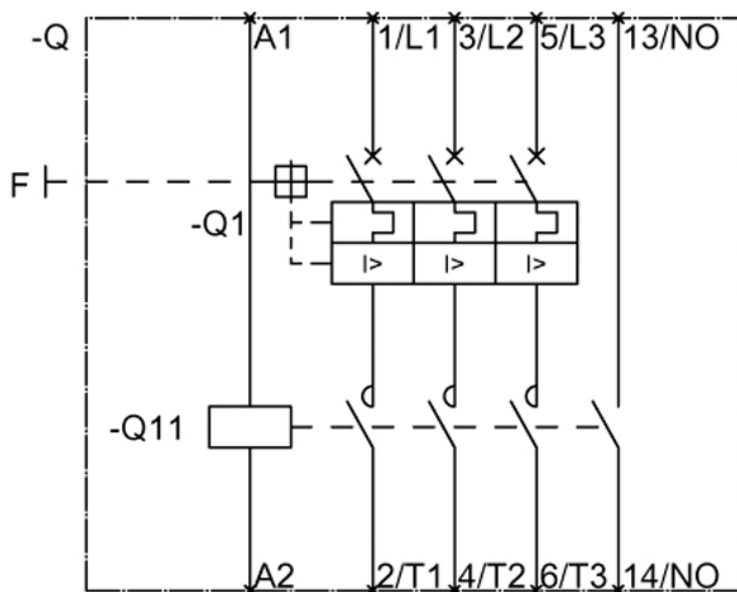

last change:

Oct 24, 2011