



MOTOR STARTER SIRIUS 3RM1 DIRECT STARTER
SAFETY 500 V;
0,1-0,5 A;
110-230 V AC PUSH-IN TYPE CONNECTION SYSTEM

General technical data:

product brand name		SIRIUS
Product designation		Motor starter
Design of the product		with electronic overload protection and safety-related shutdown
Trip class		CLASS 10A
Protection class IP		IP20
Suitability for use / Device connector 3ZY12		No
Product function / Intrinsic device protection		Yes
Type of the motor protection		solid-state
Product function / Adjustable current limitation		Yes
Installation altitude / at height above sea level / maximum	m	2,000
Ambient temperature		
• during operation	°C	-25 ... +60
• during transport	°C	-40 ... +70
• during storage	°C	-40 ... +70
Shock resistance		6g / 11 ms
Vibration resistance		1 ... 6 Hz, 15 mm; 20 m/s², 500 Hz
Surge voltage resistance / Rated value	kV	6
Insulation voltage / Rated value	V	500

Mechanical service life (switching cycles) / typical		30,000,000
Conducted interference conductor-conductor SURGE / acc. to IEC 61000-4-5		2 kV
Conducted interference BURST / acc. to IEC 61000-4-4		3 kV / 5 kHz
Conducted interference as high-frequency radiation acc. to IEC 61000-4-6		10 V
Electrostatic discharge / acc. to IEC 61000-4-2		6 kV contact discharge / 8 kV air discharge
Field-bound HF-interference emission / acc. to CISPR11		Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC
Conducted HF-interference emissions / acc. to CISPR11		Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC
maximum permissible voltage for safe isolation		
• between main and auxiliary circuit	V	500
• between control and auxiliary circuit	V	250
Reference code		
• acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750		Q
• acc. to DIN EN 61346-2		Q

Safety related data:

Safety Integrity Level (SIL) / acc. to IEC 61508		SIL3
Performance level (PL) / acc. to EN ISO 13849-1		e
Category / acc. to EN ISO 13849-1		4
T1 value / for proof test interval or service life / acc. to IEC 61508	a	20
PFHD / with high demand rate / acc. to EN 62061	1/h	0.00000002
Protection against electrical shock		finger-safe
Safety device type / acc. to IEC 61508-2		Type B
OFF-delay time / with safety-related request / when switched off via control inputs / maximum	ms	65
OFF-delay time / with safety-related request / when switched off via supply voltage / maximum	ms	120

Main circuit:

Number of poles / for main current circuit		3
Operating voltage / Rated value / maximum	V	500
Operating frequency		
• 1	Hz	50
• 2	Hz	60
Operating current / with AC / at 400 V / Rated value	A	0.5
Minimum load in % of I_M	%	20
Active power loss / typical	W	0.02

Adjustable response value current • of the current-dependent overload release	A	0.1 ... 0.5
Operating power / for three-phase motors / at 400 V • at 50 Hz	kW	0 ... 0.12
Operating frequency / maximum	1/s	1
Control circuit/ Control:		
Type of voltage / of the control supply voltage		AC/DC
Control supply voltage / 1 • for DC / Rated value • with AC • at 50 Hz • with AC • at 60 Hz	V V V	110 110 ... 230 110 ... 230
Operating range factor control supply voltage rated value • for DC • with AC • at 50 Hz • with AC • at 60 Hz		0.85 ... 1.1 0.85 ... 1.1 1.1 ... 0.85
Control current • with AC • at 230 V • in standby mode • during operation • when switching on • at 110 V • in standby mode • during operation • when switching on • for DC • in standby mode • during operation • when switching on	 mA mA mA mA mA mA mA mA mA	 6 14 25 8 25 40 4 30 13
Input voltage / at digital input • for signal <1> • for DC • with AC • with signal <0> • with AC	 V V V	 79 ... 121 93 ... 253 0 ... 40

• for DC	V	0 ... 40
Input current / at digital input		
• for signal <1>		
• with AC		
• at 230 V	mA	2.3
• at 110 V	mA	1.1
• for DC	mA	1.5
• with signal <0>		
• with AC		
• at 230 V	mA	0.4
• at 110 V	mA	0.2
• for DC	mA	0.25
Switch-on delay time	ms	90 ... 120
OFF-delay time	ms	60 ... 90

Auxiliary circuit:

Number of CO contacts / for auxiliary contacts		1
Design of the switching contact / as NO contact / for signaling function		Electronic
Operating current / of the auxiliary contacts		
• at AC-15	A	3
• at DC-13	A	1

Installation/ mounting/ dimensions:

mounting position		vertical, horizontal, standing
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	22.5
Height	mm	100
Depth	mm	141.6

Connections/ terminals:

Design of the electrical connection		
• for main current circuit		PUSH-IN connection (spring-loaded connection)
• for auxiliary and control current circuit		PUSH-IN connection (spring-loaded connection)
Type of connectable conductor cross-section		
• for main contacts		
• solid		1x (0.5 ... 4 mm²)
• finely stranded		
• with core end processing		1x (0.5 ... 2.5 mm²)
• without core end processing		1x (0.5 ... 4 mm²)
• for AWG conductors		1x (20 ... 12)

Type of connectable conductor cross-section**• for auxiliary contacts**

- solid
- finely stranded
 - with core end processing
 - without core end processing
- for AWG conductors

1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²)1x (0,5 ... 1,0 mm²), 2x (0,5 ... 1,0 mm²)1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²)

1x (20 ... 16), 2x (20 ... 16)

UL ratings:**Full-load current (FLA) / for three-phase AC motor / at 480 V /
Rated value**

A

0.5

Certificates/ approvals:**General Product Approval**

CCC



UL





ATEX

**For use in
hazardous
locations****Declaration of
Conformity**

EG-Konf.

Test Certificates[Type Test
Certificates/Test
Report](#)**other**[Confirmation](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**Cax online generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/VW/view/en/3RM1101-2AA14/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RM1101-2AA14

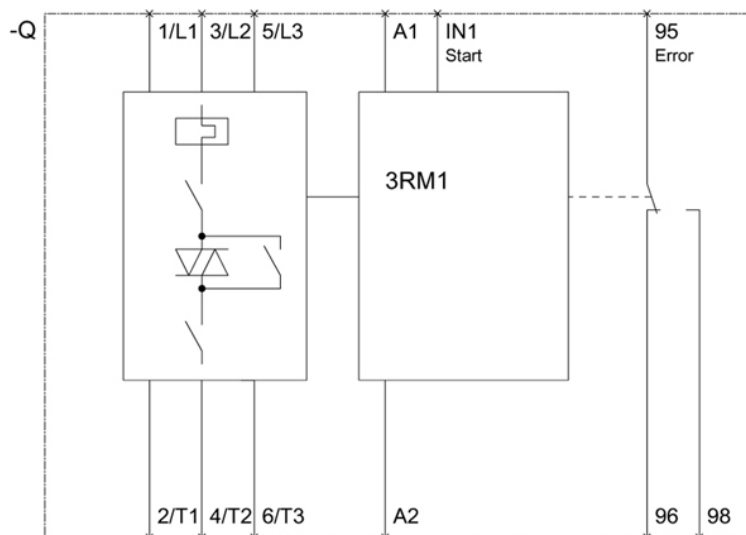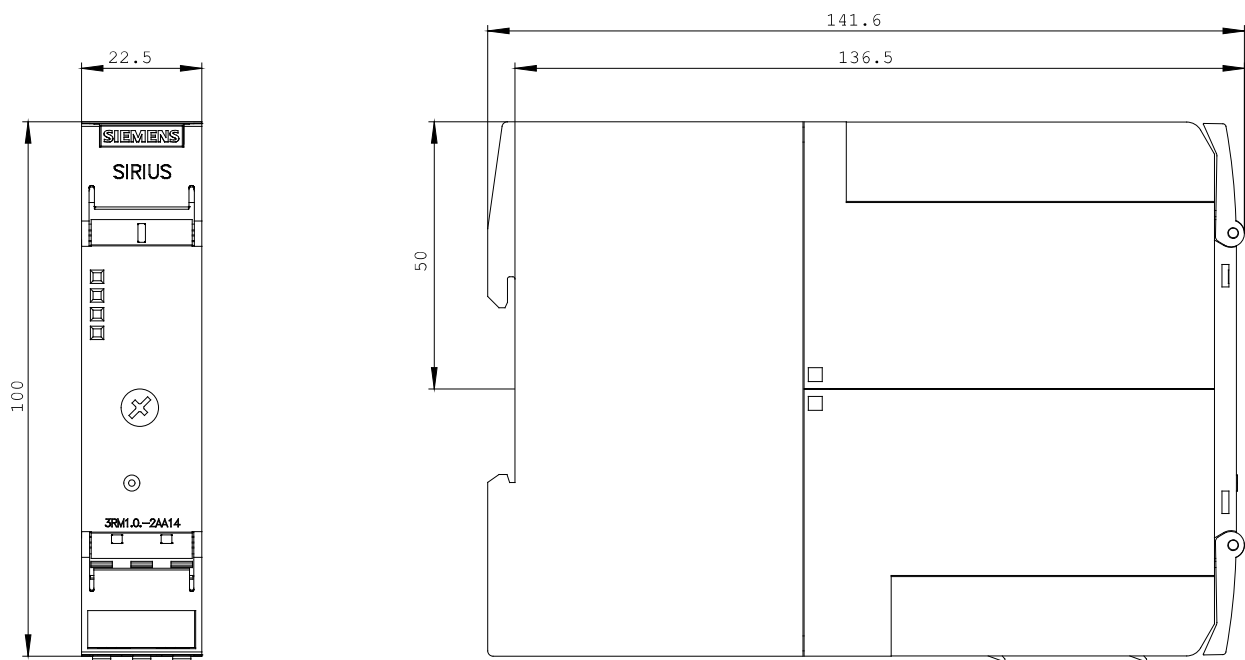

last change:

Nov 17, 2014