

LOAD BREAK SWITCHES ROTARY SWITCHES VKA 125-250A



VKA 125-160 A



VKA 200-250 A


- Compact size
- 3-pole and 4-pole VKA-switches as standard
- 2-pole upon request
- Switch technology by means of silver contacts ensures safe and durable operation
- 4-pole versions with early-make and late-break neutral pole

125-160 A:

- 6-pole and 8-pole versions consist of two 3-pole or 4-pole VKA-switches connected by a parallel kit
- Compatible with handles LK10 and LK11
- Shafts L=100/200 AD11 and L=100/200/300 AD11 / VT

200-250 A:

- Handle LK12 and shaft L=228 AD12/T6 included, suitable for 250 mm panel board
- Terminal covers LS/VKAC and phase barriers VS/VKAC enable safe use

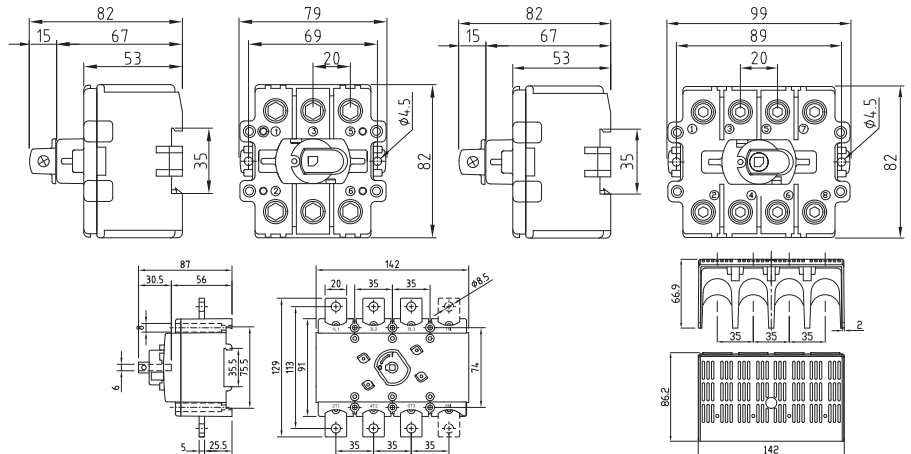

Type	AC-22	400 V	AC-23	400 V	AC-23	690 V	EAN code	E-NO	Weight kg
		415 V		415 V					
		690 V		P / kW		P / kW			
		I_e / A	I_e / A		I_e / A		6419410...		
3 poles									
VKA 3125N		125 A	100 A	55 kW	80 A	55 kW	...217504	3635083	0.51
VKA 3160N		160 A	135 A	75 kW	125 A	90 kW	...218006	3635089	0.51
4 poles									
VKA 4125N		125 A	100 A	55 kW	80 A	55 kW	...218600	3635096	0.66
VKA 4160N		160 A	135 A	75 kW	125 A	90 kW	...219102	3635098	0.66

Type	AC-22	400 V	AC-23	400 V	EAN code	E-NO	Weight kg
		415 V		415 V			
		I_e / A		P / kW			
		I_e / A	I_e / A		6419410...		
3 poles							
VKA 3250		250 A	250 A	132 kW	...218044	3600226	1.4
VKA 3250 LS/VS		250 A	250 A	132 kW	...218051	3600227	1.5
4 poles							
VKA 4250		250 A	250 A	132 kW	...219140	3600228	1.6
VKA 4250 LS/VS		250 A	250 A	132 kW	...219157	3600229	1.7