

# ABB Welcome™ M2203x-W 4.3" Video handset indoor station

M22302-W

M22303-W

### 4.3" Video handset indoor station


Video indoor station equipped with a handset. It is used to initiate and accept communication with outdoor stations, guard stations, and indoor stations. It is easy to install requiring only a single pair of non-polarized wires. The station can either be table or surface mounted.

### Key features

- 6 touch film buttons for communication, unlocking, mute, programmable button, surveillance and setting.
- Automatically saves 2 photos of the visitors when a call is received from video outdoor station.
- Holds up to 25 images.
- Call transfer between different apartments and guard unit.
- "Doctor" function for automatic unlock.
- 5 ringtones.
- Can be surface and desktop mounted (desktop bracket 42311D is required for desktop mounting).




Number	Function
1	Handset
2	4.3" color display
3	Unlock button
4	Surveillance button
5	Mute button
6	Programmable button 1
7	Programmable button 2
8	System setting button
9	Induction loop function (optional)

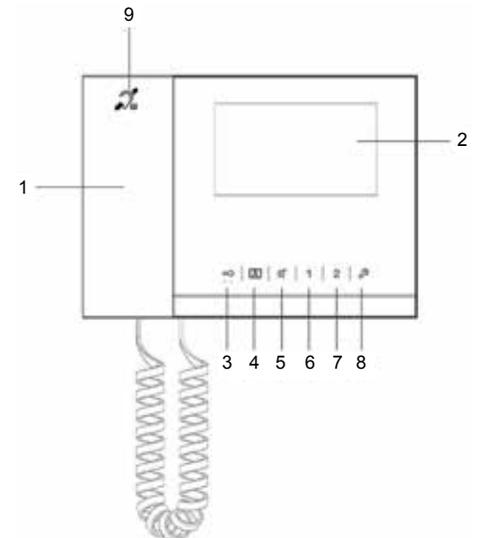

# ABB Welcome™

## M2203x-W 4.3" Video handset indoor station

Number	Function
1	Default outdoor station
2	Address selector
3	Master/slave function
4	Terminal resistor
5	a,b            Bus connection
	 Doorbell connection
	DC/GND            Additional power supply

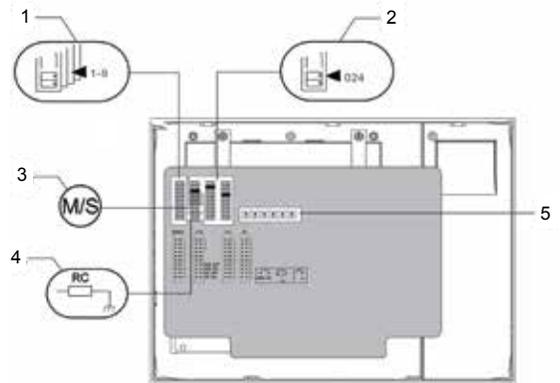

1SXU460020L0201, September 2015

### Specifications

- Display resolution: 480 x 272 pixels
- Display size: 4.3"
- Operating temperature: -40 °F – 131 °F
- Ingress protection: IP30
- Bus voltage: 20-30 VDC  
(From system controller or system component configured as local power supply)
- Product dimensions: 5.67" x 7.80" x 1.77"

## Contact us

**ABB**  
 Low Voltage Products  
 8155 T&B Boulevard  
 Memphis, TN 38125  
[www.abb.us/lowvoltage](http://www.abb.us/lowvoltage)

USA Technical Support: 888-862-3289  
 Customer Service: 888-862-3290  
 7:00 a.m. – 5:30 p.m., CST, Monday – Friday  
[techsupport@tnb.com](mailto:techsupport@tnb.com)