



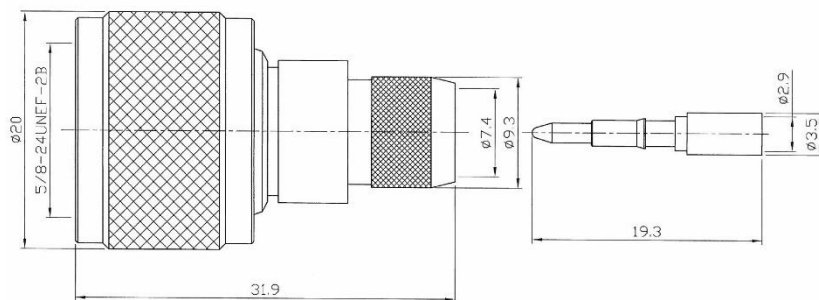
N Plug crimp
N3100B-ECO10


Egnede kabler:
ECOFLEX10



EAN: 5704717002313

JYEBAO
N3100B-ECO10











1. BRASS.
2. TIN-ZINC-COPPER-ALLOY PL. 100 MIN. OVER COPPER PL. 50 MIN.
3. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY PL. 80 MIN. OVER COPPER PL. 20 MIN.

JYE BAO CO., LTD.
TAIPEI TAIWAN
N PLUG CRIMP
N3100B-ECO10

JYE BAO CO., LTD.

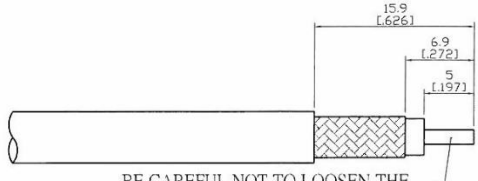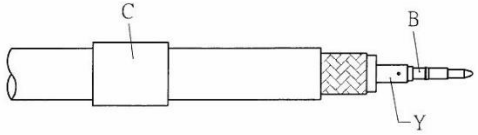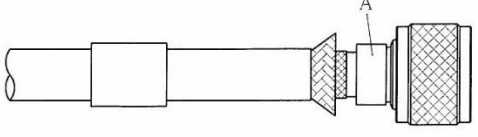TAIPEI TAIWAN

N3100B-ECO10		DATE	2014/02/05	REV	—
A		B		C	
					
BODY		CONTACT PIN		FERRULE	
DIAGRAM			ASSEMBLY INSTRUCTION		
 BE CAREFUL NOT TO LOOSEN THE STRANDS ON THE CENTER CONDUCTOR			Step 1: STRIP AS SHOWN.		
			Step 2: SLIDE FERRULE "C" OVER CABLE. Step 3: PUT PIN "B" ON CENTER CONDUCTOR AND CRIMP IN "Y".		
			Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR "A" IN PLACE.		
			Step 5: SLIDE FERRULE "C" TOWARDS THE CONNECTOR "A" AND CRIMP.		