

## Data sheet for SIMOTICS S-1FK2




Figure similar

### MLFB-Ordering data

1FK2210-3AC00-1MA0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

| Basic motor data        |                                                           | Mechanical data               |                      |
|-------------------------|-----------------------------------------------------------|-------------------------------|----------------------|
| Motor type              | Permanent-magnet synchronous motor, Natural cooling, IP64 | Design acc. to Code I         | IM B5 (IM V1, IM V3) |
| Motor type              | Compact                                                   | Vibration severity grade      | Grade A              |
| Static torque           | 30.00 Nm                                                  | Shaft height                  | 100                  |
| Static current          | 15.0 A                                                    | Flange size (AB)              | 192 mm               |
| Maximum torque          | 90.00 Nm                                                  | Centering ring (N)            | 180 mm               |
| Maximum current         | 55.0 A                                                    | Hole circle (M)               | 215 mm               |
| Maximum speed           | 4400 rpm                                                  | Screw-on hole (S)             | 14.0 mm              |
| Rotor moment of inertia | 88.800 kgcm <sup>2</sup>                                  | Overall length (LB)           | 198 mm               |
| Weight                  | 22.0 kg                                                   | Diameter of shaft (D)         | 38 mm                |
|                         |                                                           | Length of shaft (E)           | 80 mm                |
|                         |                                                           | Length of flange diagonal (P) | 244 mm               |
|                         |                                                           | Shaft extension               | Fitted key           |

### Rated data

SINAMICS S210, 3AC 400V

|               |          |
|---------------|----------|
| Rated speed   | 2000 rpm |
| Rated torque  | 26.00 Nm |
| Rated current | 13.5 A   |
| Rated power   | 5.50 kW  |

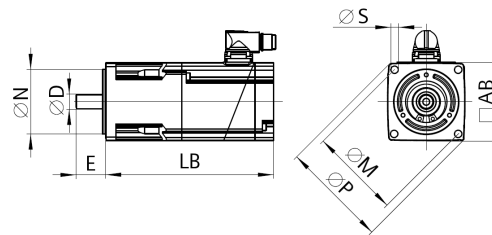


Figure similar

### Encoder system

|                |                                                             |
|----------------|-------------------------------------------------------------|
| Encoder system | Encoder AM22DQC: Absolute encoder 22 bit + 12 bit multiturn |
|----------------|-------------------------------------------------------------|

### Motor connection

|                 |              |
|-----------------|--------------|
| Connection type | OCC for S210 |
| Connector size  | M23          |