



Figure similar

MLFB-Ordering data 1FK2105-4AF10-1MA0

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Basic motor data		Mechanical data	
Motor type	Permanent-magnet synchronous motor, Natural cooling, IP64	Design acc. to Code I	IM B5 (IM V1, IM V3)
Motor type	High Dynamic	Vibration severity grade	Grade A
Static torque	5.00 Nm	Shaft height	52
Static current	4.7 A	Flange size (AB)	105 mm
Maximum torque	15.00 Nm	Centering ring (N)	95 mm
Maximum current	18.0 A	Hole circle (M)	115 mm
Maximum speed	6000 rpm	Screw-on hole (S)	9.0 mm
Rotor moment of inertia	2.550 kgcm²	Overall length (LB)	202 mm
Weight	6.6 kg	Diameter of shaft (D)	19 mm
Rated data		Length of shaft (E)	40 mm
		Length of flange diagonal (P)	135 mm
		Shaft extension	Fitted key

SINAMICS S210, 3AC 400V

Rated speed	3000 rpm
Rated torque	4.60 Nm
Rated current	4.4 A
Rated power	1.45 kW

Encoder system	
Encoder system	Encoder AM22DQC: Absolute encoder 22 bit + 12 bit multiturn

Motor connection	
Connection type	OCC for S210
Connector size	M17

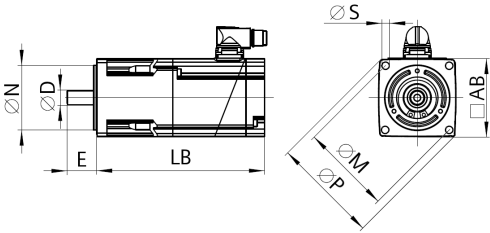


Figure similar

1FK2105-4AF10-1MA0

Figure similar

¹⁾ Up to three consecutive emergency stops and up to 25% of all emergency stops as a Wmax high energy stop possible.

²⁾ Typical value for 20°C ambient temperature. At -15°C the break-induced currents can be increased by up to 30%.