



## MasterCross-Laser 2P

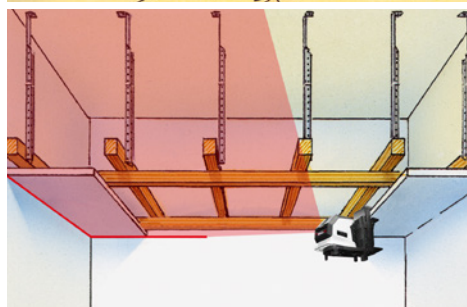

Cross-line laser with 2 clearly visible laser lines, plumb function and integrated hand receiver mode

Rev.0316

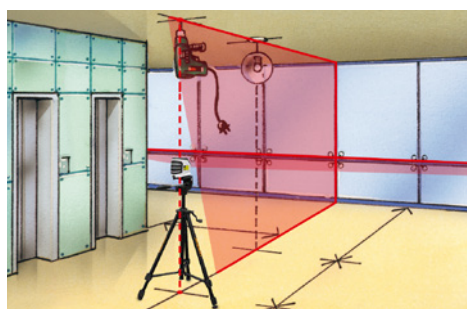


- **PowerBright-Laser<sup>+</sup>**: Special high-performance laser diodes project extremely visible laser lines.
- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- Additional plumb laser at top and bottom
- With the **magnetic clamp and wall bracket** the device can be used as a standalone unit, in a combination as well as in horizontal and vertical position.
- Ideal for mounting horizontally and vertically on **drywall construction profiles**.
- **Automatic Level**: automatic alignment by virtue of a magnetic pendulum system.
- **Tilt mode is an additional feature** that permits gradients to be laid out.
- **Individually switchable** laser lines and plumb laser
- **Out-Of-Level**: is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready**: The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 40 m radius – ideal for all interior and exterior applications.
- **Transport lock**: A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

### TECHNICAL DATA

<b>ACCURACY</b>	2 mm per 10 m
<b>SELF-LEVELLING RANGE</b>	± 3°
<b>OPERATING RANGE</b> (depending on room illumination)	20 m
<b>LEVELLING</b>	automatic
<b>LASER WAVELENGTH</b>	635 nm
<b>LASER</b> line lasers, class 2 < 1 mW	
<b>POWER SUPPLY</b> 4 x 1,5V type AA, approx. 8 hrs operating time	
<b>WORKING TEMPERATURE</b> 0°C ... +50°C	
<b>STORAGE TEMPERATURE</b> -10°C ... +70°C	
<b>WEIGHT</b> MCL 2P incl. batteries	560 g (without wall bracket)
<b>DIMENSIONS</b> MCL 2P 66 x 100 x 125 mm (W x H x D)	

1H 1V 2P



**MasterCross-Laser 2P**  
including carrying case  
+ clamp and wall bracket  
+ batteries


**Packing dimension** (W x H x D)  
340 x 275 x 123 mm



Additional plumb laser  
at top and bottom



Height and position of  
the measuring device  
easily adjustable



For mounting  
horizontally  
and vertically

ARTICLE	ARTICLE NO	EAN-CODE	PU
MasterCross-Laser 2P	031.360A	4 021563 695379	1

